3T 707 1



Brief Introduction Beta 2.5	The standard portable 3T 707 1 LCD projector has 2600 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes image adjustment childs play. A picture width of up to 444 cm is possible. However, the picture should be smaller in room light. We recommend max. 296 cm. It is no longer offered by the manufacturer 3T.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2600	841 Lux (bei 203 cm Screen)
Contrast	450:1 full on/off	450:1 full on/off
Black Level	5,7778 min. Lumen	1.882 min. Lumen

Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	F=1,7-2,0 f=34-43 mm
Throw Ratio	1,86-2,35:1
Audio	-
Connections	DVI D-sub 15pin in YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack RS232C
Ceiling Mounting	Yes
Power	-
Size WxHxD	348 x 110 x 267 mm (13,7"x4,3"x10,5") 10,22 L/dm³
Operating Noise	35dB
Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-40° Hori.: +/-15°
Illumination	90%
Frequenz	H-sync: 15-69 kHz V-sync: 43-85 Hz

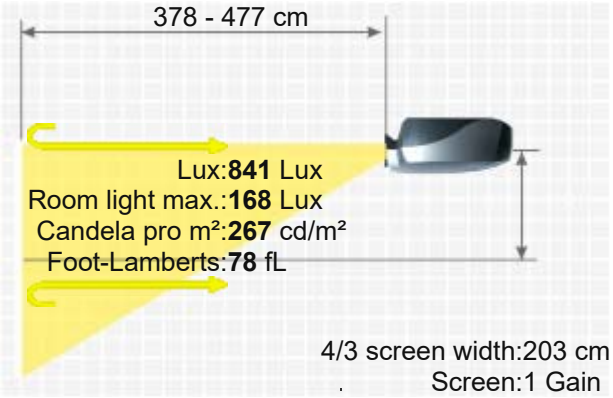

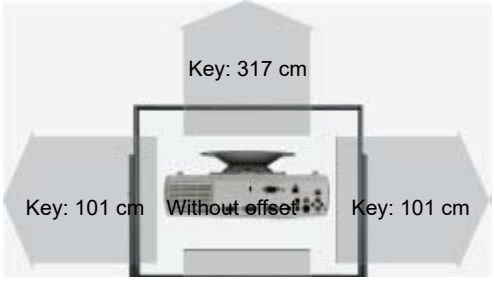



Foot-Lamberts	78 fL / max. 444 cm screen width
	267 cd/m²
Features	■ Picture-in-Picture ■ Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/3T7071-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.