H-PEC H 3510IB




Brief Introduction Beta 2.5	The Whiteboard H-PEC H 3510IB LCD projector has 3500 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. An image width of up to 515 cm is possible, if the image width is smaller (we recommend max. 343 cm), rooms with residual light are also no problem. The projector is equipped with an integrated whiteboard function for interactive training and presentations. The model was built by H-PEC in 2012 and is no longer current, but is still very popular in our projector database.
Display Type	3 x LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	3500
Contrast	500:1 full on/off
Black Level	7,0000 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Whiteboard | Training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	230 / 220W im Eco Mode Lamp
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,65-1,93 f=18,53-22,18 mm
Throw Ratio	1,45-1,73:1
Audio	1 x 8W
Connections	DVI-I in D-sub 15 pin in und out S-Video in Cinch Video in Cinch Stereo in RS232C Din 9 pin in USB Typ B
Ceiling Mounting	Yes
Power	310W
Size WxHxD	325 x 97 x 260 mm (12,8"x3,8"x10,2") 8,2 L/dm³
Operating Noise	30 dB in Eco Mode

Projector

Lux	1167 Lux (bei 200 cm Screen)
Contrast	500:1 full on/off
Black Level	2,348 min. Lumen

Screen

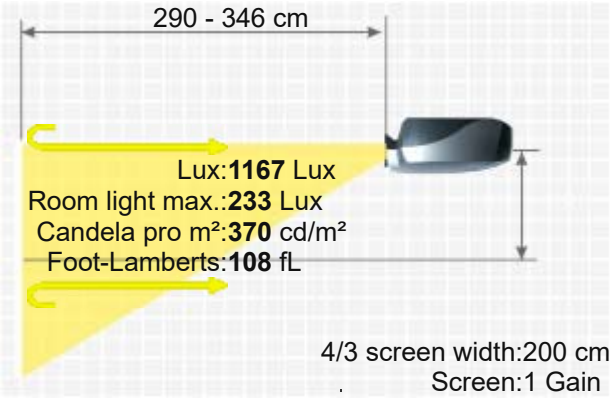

Key: 167 cm

H-PEC H 3510IB



Weight	3,30 kg / 7,28 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 31-92 kHz V-sync: 48-120 Hz
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Remote control with laser pointer ■ Whiteboard function.
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/HPECH3510ib-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.