
ACCO NOBO X22C



Brief Introduction Beta 2.5	The standard portable ACCO NOBO X22C BrilliantColor DLP projector has 2200 Ansi lumens, a contrast of 2200:1 and an XGA 1024 x 768 resolution. 2200 Ansi lumens ensure that a picture width of 408 cm is also possible. However, if room light is available, the picture should be max. 272 cm wide. The model was built by ACCO in 2007 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2200 / 1500 im Eco Mode — Screen: 712 Lux (bei 203 cm Screen)
Contrast	Projector: 2200:1 full on/off — Screen: 2200:1 full on/off
Black Level	Projector: 1,0000 min. Lumen — Screen: 0.324 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA+ 1400 x 1050 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W Lamp Articel Nr.: SP.88N01GC01
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,1
Objective	F=2,41-2,55 f=21,79-23,99 mm
Throw Ratio	1,95-2,15:1
Audio	1W Mono
Connections	DVI-I mit HDCP in D-sub 15 pin in und out S-Video in Cinch Video in USB Maus Port RS232C
Ceiling Mounting	Yes
Power	260W / 10W standby
Size WxHxD	259 x 72,5 x 188 mm (10,2"x2,9"x7,4") 3,51 L/dm³
Operating Noise	32 / 30 dB in Eco Mode
Weight	2,00 kg / 4,41 lbs.
Keystone	Vert.: +/-18°
Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 43-85 Hz
Foot-Lamberts	66 fL / max. 408 cm screen width 226 cd/m²



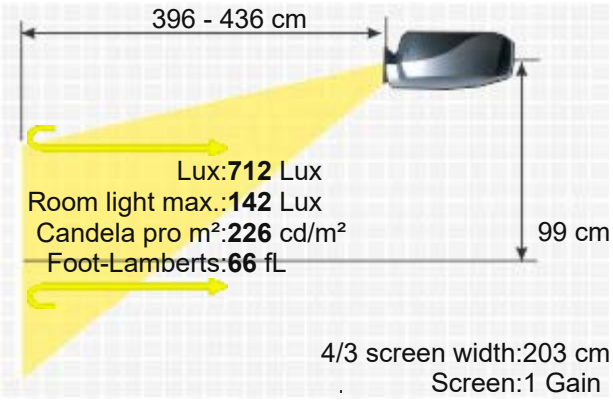

ACCO NOBO X22C

Features	■ Freeze ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Digital image shift ■ Password protection ■ BrilliantColor™ ■ Remote control with laser pointer und mouse control ■ Overscan adjustable ■ 5-segment colour wheel.
Optional	Bulb only: NLMP17909 Lamp ruby: Ruby-LMP17909 Lamp original: SP.88N01GC01 Compatible lamp: LMP-K17908 Universal Remote original: Fernb-uni-V3 Ceiling Mount 100-120: Halterung100
Status Data	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n17908 2007 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/acconobox22c-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.