

Acer H5350



Brief Introduction Beta 2.5	With the H5350, manufacturer Acer offers a home cinema DLP projector with HDTV 1280 x 720 resolution and a contrast of 2000:1. An image width of up to 454 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the image should be max. 303 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by Acer in 2008 and is no longer current, but is still a popular projector in our database.
Display Type	1 x DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	2000 / 1600 im Eco Mode
Projector: Contrast	2000:1 full on/off
Projector: Black Level	1,0000 min. Lumen
Screen	889 Lux (200 cm Screen width)
Screen: Contrast	2000:1 full on/off
Screen: Offset	0,445 min. Lumen
Resolution	HDTV 1280 x 720 921.600 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W P-VIP Lamp Article Nr.: EC.J5200.001
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,09
Objective	F=2,44-2,58 f=21,83-23,81 mm
Throw Ratio	1,549-1,701:1
Audio	1 x 2W Mono
Connections	HDMI in D-sub 15 pin in S-Video in Cinch Video in USB Typ B
Ceiling Mounting	Yes, is possible.
Power	245W
Size WxHxD	267 x 80 x 187 mm (10,5"x3,1"x7,4") 3,99 L/dm³

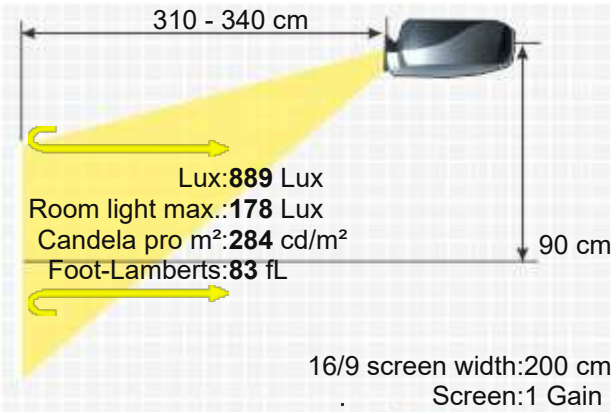



Operating Noise	32 / 28 dB in Eco Mode	Key: 350 cm
Weight	2,30 kg / 5,07 lbs.	
Keystone	Vert.: +/-40°	
Illumination	85%	
Frequenz	H-sync: 31-100 kHz V-sync: 56-85 Hz	Key: 170 cm
Foot-Lamberts	83 fL / max. 454 cm screen width 284 cd/m²	
Features	■ Full HD 1080P compatible ■ Freeze ■ Blackboard Modus ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ Password protection ■ BrilliantColor™ ■ Optional Wi-Fi network compatible. ■ Digital zoom 2x. ■ Unishape™ ■ 6 segment colour wheel.	
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads	
In Test	-	

Optional accessories

	Nackte Osram Lampe	NLMP17877	59,26 €
	Lampe Ruby	Ruby-LMP17877	84,88 €
	Lampe Original	EC.J5600.001	EOL €
	Kompatible Lampe	LMP-K17877	55,24 €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Fernbedienung Original	MC.JK211.007 / VZ.J5300.005 / VZ.J5600.002	25,29 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2008 Discontinued (EOL) // Last update of the data: 2026-06-08

Data



More Details

HCinema

https://www.projector-database.com/pro/acerh5350-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.