
Acer H5382BD




Brief Introduction Beta 2.5	The H5382BD 3D DLP projector from Acer has 3300 Ansi lumens, a contrast of 20000:1 and an HDTV 1280 x 720 resolution. The manufacturer Acer specifies a lamp life of 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. The projector can illuminate a picture width of up to 584 cm well thanks to the 3300 Ansi lumens. In room light, however, the image width should ideally be less than 389 cm. A smartphone with MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). Video signals 1080P and 3D are also no problem for the projector. The model was built by Acer in 2016 and is no longer current, but is still very popular in our projector database.
Display Type	1 x 0,62" DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3300 / 2640 im Eco Mode — Screen: 1424 Lux (bei 203 cm Screen)
Contrast	Projector: 20000:1 full on/off — Screen: 20000:1 full on/off
Black Level	Projector: 0,1650 min. Lumen — Screen: 0.071 min. Lumen
Offset	
Resolution	HDTV 1280 x 720 921.600 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | 3D Blu-ray (komprimiert) | ~~4K UHD Blu-ray~~
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Homeciname | Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	195W P-VIP Lamp Articel Nr.: MC.JMV11.001
Light Life	5000 h. 10000 h. in Eco Mode
Operating Costs	4,11% / 0,03 €
Focus	Manual
Zoom	Manual 1,12
Objective	F=2,41-2,53 f=21,85-24,00 mm
Throw Ratio	1,54-1,72:1
Audio	3W Mono
Connections	HDMI mit MHL in D-sub 15pin in Cinch Video in



Mini Jack Audio in und out
RS232C Din 9 pin in
USB Typ A

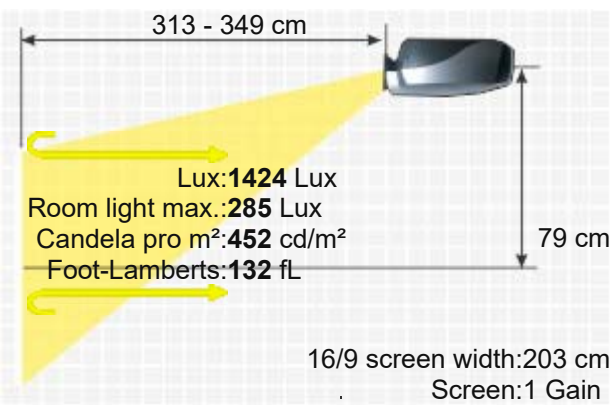

Ceiling Mounting	Yes
Power	235W
Size WxHxD	315 x 98 x 214 mm (12,4"x3,9"x8,4") 6,61 L/dm³
Operating Noise	31 / 28 dB in Eco Mode

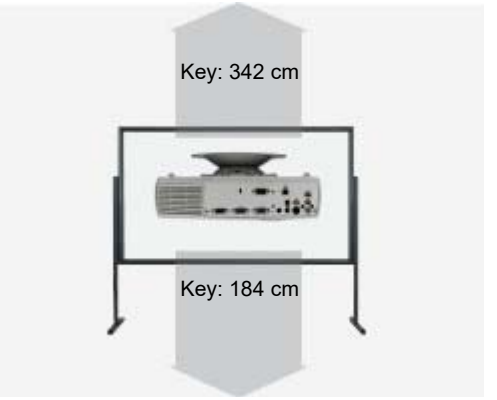

Weight	2,40 kg / 5,29 lbs.
Keystone	Vert.: +/-40°
Illumination	85%
Frequenz	-
Foot-Lamberts	132 fL / max. 584 cm screen width
	452 cd/m²

Features
- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- 6-segment colour wheel
- 2x digital zoom

Optional

Remote control original	MC.JMV11.008
Lamp original	MC.JMV11.001

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro23965

Status
2016 Discontinued (EOL) // Last update of the data: 2023-09-20
Created: 2016-08-29 14:37:12

Data



More Details

https://www.projector-database.com/pro/acerh5382bd-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.