

Acer P1200N

ACER P1200N



The standard portable Acer P1200N 3D DLP projector has 2600 Ansi lumens, a contrast of 3700:1 and an XGA 1024 x 768 resolution. The lamp life is specified by the manufacturer as 4000 hours, which converts to over 5.5 years at 2 hours per day. A picture width of up to 444 cm is possible. However, the picture should be smaller in room light. We recommend max. 296 cm. The projector can also play 1080P without any problems. At just 28 decibels, the device is one of the quieter projectors. The model was built by Acer in 2010 and is no longer current.



1 x 0,55" DC3 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

2600 / 2080 im Eco Mode
3700:1 full on/off
0,7027 min. Lumen

Screen

867 Lux (200 cm Screen width)
3700:1 full on/off
0,235 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes
3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Frame Sequential (3D Ready)
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.
180W P-VIP Lamp
Article Nr.: EC.K1500.001
4000 h. 5000 h. in Eco Mode

Manual


Manual 1,1


F=2,41-2,55 f=21,79-23,99 mm

1,95-2,15:1

1 x 2W

2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
USB
RS232C
RJ45 in
Mini Jack Audio in und out

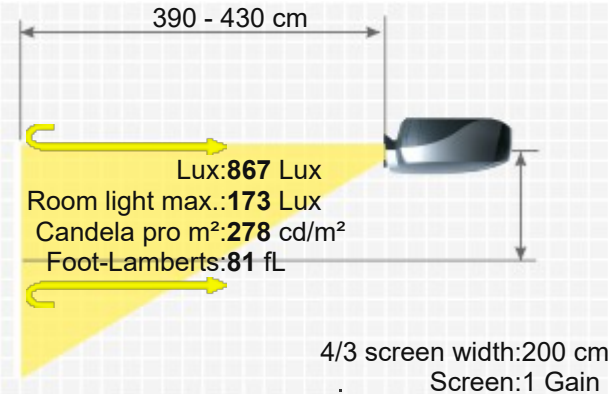



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
255W
269 x 84 x 206 mm (10,6"x3,3"x8,1") 4,65 L/dm³
28 / 25 dB in Eco Mode

Weight
Keystone
Illumination

2,34 kg / 5,16 lbs.
Vert.: +/-40°
90%

Frequenz

H-sync: 30-100 kHz
V-sync: 50-120 Hz


Foot-Lamberts

81 fL / max. 444 cm screen width
278 cd/m²

- Features
- Full HD 1080P compatible
 - Freeze
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Remote control with laser pointer
 - Lan network compatible.

Screen Mirroring

-

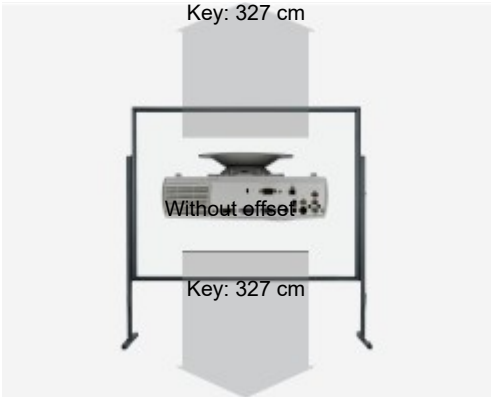

Optional accessories

	Nackte Osram Lampe	NLMP19676	50,94 €
	Lampe Original	EC.K1500.001	EOL €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Fernbedienung Original	MC.JK211.007 / VZ.J5300.005 / VZ.J5600.002	25,29 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status
Data

2010 Discontinued (EOL) // Last update of the data: 2026-05-05

More Details



HCinema

<https://www.projector-database.com/pro/acerp1200n-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.