Acer P1266P



Brief Introduction Beta 2.5	The standard portable P1266P BrilliantColor DLP has 2700 Ansi lumens, a contrast of 2700:1 and an XGA 1024 x 768 resolution. 453 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 302 cm. Furthermore, the projector can play 1080P without any problems. With only 30 decibels of operating noise, the model is very quiet compared to others. The model was built by Acer in 2009 and is no longer current.
Display Type	1 x 0,55" DC2 DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Projector Ansi-Lumen	2700 / 2160 im Eco Mode
Contrast	2700:1 full on/off
Black Level	1,0000 min. Lumen
Offset	-
Screen Ansi-Lumen	900 Lux (200 cm Screen width)
Contrast	2700:1 full on/off
Black Level	0,334 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W P-VIP Lamp Article Nr.: EC.J6900.003
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,41-2,66 f=18,17-21,81 mm
Throw Ratio	1,60-1,92:1
Audio	2W Mono
Connections	HDMI in D-sub 15 pin in S-Video in Cinch Video in USB Typ B RS232C
Ceiling Mounting	Yes, is possible.
Power	280W
Size WxHxD	269 x 96 x 206 mm (10,6"x3,8"x8,1") 5,32 L/dm³

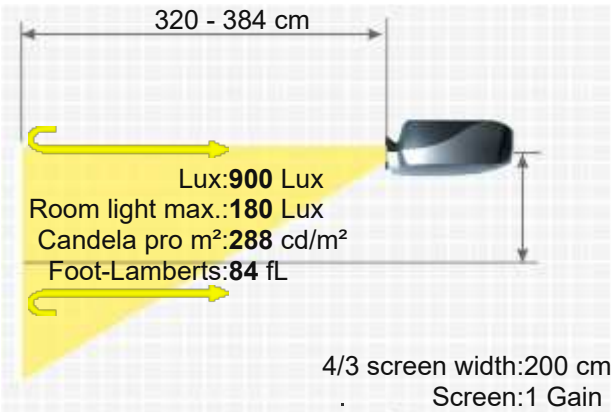

Operating Noise	30 / 25 dB in Eco Mode
Weight	2,50 kg / 5,51 lbs.
Keystone	Vert.: +/-40°
Illumination	90%
Frequenz	H-sync: 31,5-100 kHz V-sync: 50-85 Hz
Foot-Lamberts	84 fL / max. 453 cm screen width 288 cd/m²
Features	■ Full HD 1080P compatible ■ Blackboard Modus ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Password protection ■ BrilliantColor™ ■ Remote control with laser pointer ■ UNISHAPE™ ■ Digital zoom 2x. ■ 6-segment colour wheel. ■ Digital zoom 2X
Screen Mirroring	-

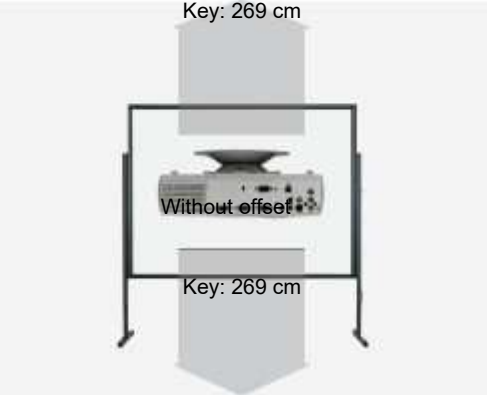

Optional accessories

	Nackte Osram Lampe	NLMP18677	61,46 €
	Lampe Original	EC.J6900.003	EOL €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2009 Discontinued (EOL) // Last update of the data: 2026-06-08

Data 

More Details

HCinema

https://www.projector-database.com/pro/acerp1266p-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.