
Digital Projection Blacklite 6000



Brief Introduction Beta 2.5	A brief introduction to the Blacklite 6000: The digital projection DLP projector offers 3500 Ansi lumens, a contrast of 1200:1 f and an SXGA 1280 x 1024 resolution. The projector can illuminate images up to 501 cm wide thanks to the 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 334 cm is recommended. The projector is no longer sold by the manufacturer. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.
Display Type	3 x DLP Chip SXGA 5/4 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3500 +/- 10% — Screen: 1062 Lux (bei 203 cm Screen)
Contrast	Projector: 1200:1 full on/offf — Screen: 1200:1 full on/offf
Black Level	Projector: 2,9167 min. Lumen — Screen: 0.887 min. Lumen
Offset	-
Resolution	SXGA 1280 x 1024 1.310.720 Pixel
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43 DTV und HDTV kompatibel
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	1250W Xenon Lamp Articel Nr.: LA00288
Light Life	1000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered
Objective	-
Throw Ratio	-
Audio	2 x 3W
Connections	DVI RGBH(HV)V, YCr/Pr, Cb/Pb(2) BNC RGBH(HV)V (1) D-sub 15pin YPbPr/YCbCr (1) RCA Composite Video (1) BNC (1) RCA S-Video (1) Mini DIN Y/C (1) BNC Control In RS232 9-pin (1) D-sub Control Out RS232 9-pin (1) D-sub for
Ceiling Mounting	Yes
Power	-
Size WxHxD	-
Operating Noise	52dB
Weight	43,00 kg / 94,8 lbs.

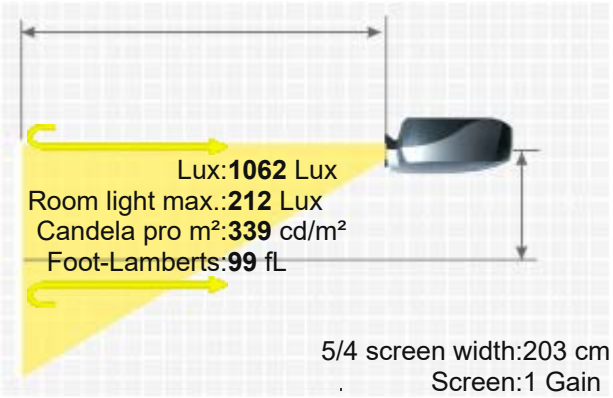

DIGITAL PROJECTION BLACKLITE

Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	99 fL / max. 501 cm screen width 339 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/DigitalProjectionBlacklite6000-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.