
Acer P7500




ACER P7500

Brief Introduction Beta 2.5	A brief introduction to the P7500: The Acer BrilliantColor DLP projector offers 4000 Ansi-Lumen, a contrast of 40000:1 and a HDTV 1920 x 1080 resolution. The projector also offers a lens shift function that makes image adjustment childs play. Thanks to the brightness of 4000 Ansi lumens, a picture width of 643 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 429 cm). It is also Full HD 1080P compatible. The model was built by Acer in 2010 and is no longer current, but is still one of the very popular projectors.
Display Type	1 x 0,7" DC3 DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 4000 / 3600 im Eco Mode — Screen: 1778 Lux (200 cm Screen width)
Contrast	Projector: 40000:1 full on/off — Screen: 40000:1 full on/off
Black Level	Projector: 0,1000 min. Lumen — Screen: 0,044 min. Lumen
Lens shift	Vert.: +65% --52% Hori.: +/-15%
Resolution	HDTV 1920 x 1080 2.073.600 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	330W P-VIP Lamp Article Nr.: EC.K2700.001
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,52
Objective	F=2,45-2,9 f=22,18-33,27 mm
Throw Ratio	1,50-2,28:1
Audio	2 x 3W
Connections	2 x HDMI in DVI mit HDCP in 2 x D-sub 15 pin in S-Video in Cinch Video in Mini Jack Audio in und out USB Typ A, B RS232C 12V Trigger out

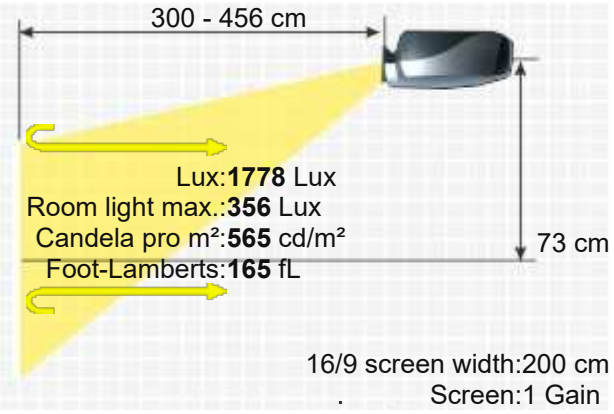

	RJ45 in
Ceiling Mounting	Yes, is possible.
Power	440W
Size WxHxD	398 x 130 x 310 mm (15,7"x5,1"x12,2") 16,04 L/dm³
Operating Noise	33 / 29 dB in Eco Mode

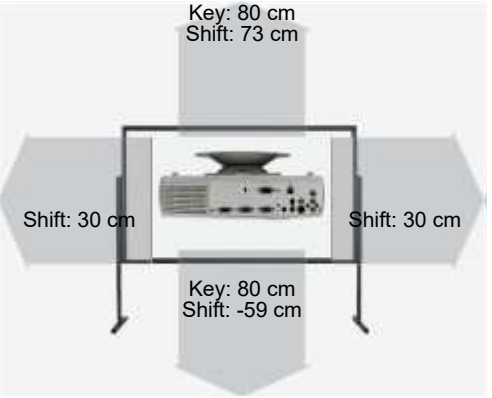

Weight	7,50 kg / 16,53 lbs.
Keystone	Vert.: +/-15°
Illumination	90%
Frequenz	H-sync: 30-100 kHz V-sync: 50-85 Hz
Foot-Lamberts	165 fL / max. 643 cm screen width 565 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ Freeze ■ Blackboard Modus ■ Eco Mode ■ Kensington Slot ■ sRGB ■ Gamma correction ■ Picture-in-Picture ■ Password protection ■ BrilliantColor™ ■ Remote control with laser pointer ■ Lan network compatible. ■ Overscan adjustable ■ Crestron®-Software compatible. ■ UNISHAPE™ ■ Digital Zoom 8x ■ 6-segment colour wheel
Screen Mirroring	Optional only Chromecast / Fire TV / Apple TV / Mi Box Ads

Optional accessories

	Nackte Philips Lampe	NLMP19917	173,68 €
	Lampe Original	EC.K2700.001	EOL €
	Fernbedienung mit Laserpointer	MC.JMV11.00G	28,86 €
	Fernbedienung Original	MC.JH211.001	39,64 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status: 2010 Discontinued (EOL) // Last update of the data: 2026-06-08

Data



More Details

HCinema

https://www.projector-database.com/pro/acerp7500-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.