
Acer PD110z



Brief Introduction Beta 2.5	The Acer PD110z DLP projector has 1100 Ansi lumens, a contrast of 1500:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of up to 289 cm well thanks to the 1100 Ansi lumens. In room light, however, the image width should ideally be less than 193 cm. The model was built by Acer in 2004 and is no longer current.
Display Type	1 x DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1100 / Screen: 356 Lux (bei 203 cm Screen)
Contrast	Projector: 1500:1 full on/off / Screen: 1500:1 full on/off
Black Level	Projector: 0,7333 min. Lumen / Screen: 0.238 min. Lumen
Offset	
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W P-VIP Lamp Articel Nr.: EC.J0501.001
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,4-2,7 f=19,7-23,6 mm
Throw Ratio	-
Audio	Nein
Connections	D-sub 15pin in und out Cinch Video in S-Video in USB in
Ceiling Mounting	-
Power	210W



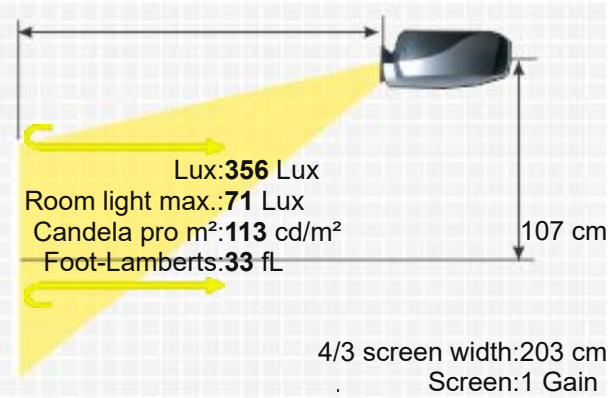

Size WxHxD	272 x 86 x 211 mm (10,7"x3,4"x8,3") 4,94 L/dm³
Operating Noise	32dB
Weight	2,00 kg / 4,41 lbs.
Keystone	Vert.: +/-16°
Illumination	90%
Frequenz	H-sync: 15-70 kHz V-sync: 43-85 Hz
Foot-Lamberts	33 fL / max. 289 cm screen width 113 cd/m²
Features	Kensington Slot

Optional

Bulb only Osram	NLMP218
Lamp ruby	Ruby-LMP218
Lamp original	EC.J0501.001
Compatible lamp	LMP-K217
Remote original	MC.JMV11.00G

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n217

Status: 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema

https://www.projector-database.com/pro/acerpd110z-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.