
Acer UL5210






ACER UL5210

Brief Introduction Beta 2.5	The Acer UL5210 model is a DLP projector with XGA 1024 x 768 resolution and a contrast of 13000:1. The lamp life of the projector is specified as 20000 hours, which is equivalent to over 27.4 years at 2 hours per day. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. As it is a short-throw projector, the projector can be positioned very close to the wall. For a 2 m wide image, the projector only needs to be positioned 60 cm away from the screen. The model offers a microphone jack plug and 16W speakers, so no additional audio devices are required for presentations or training courses. Furthermore, the projector can play 1080P and 3D without any problems. At 28 decibels, the projector is very quiet compared to other projectors. The model was built by Acer in 2019 and is no longer current.
Display Type	1 x 0,65" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3500 / 2800 im Eco Mode; Screen: 1167 Lux (bei 200 cm Screen)
Contrast	Projector: 13000:1 full on/off; Screen: 13000:1 full on/off
Black Level	Projector: 0,2692 min. Lumen; Screen: 0,09 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Disc Recognition	DVD | HD Blu-ray (komprimiert) | 3D Blu-ray (komprimiert) | ~~4K UHD Blu-ray~~
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	190W UHP Lamp Articel Nr.: UC.JQX11.001
Light Life	20000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	F=2,4 f=34,9mm
Throw Ratio	0,3:1
Audio	1 x 16W

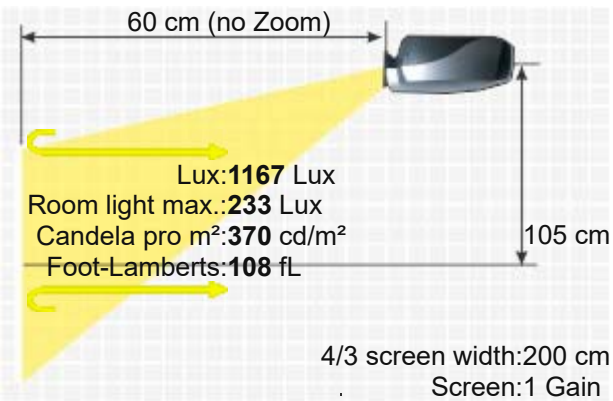

Connections	2 x HDMI D-sub 15pin in und out Cinch Video in Cinch Stereo in Mini Jack Audio in und out Microphone USB in 3DSync 12V Trigger out RS232C Din 9 pin in RJ45 in
Ceiling Mounting	Yes
Power	280W
Size WxHxD	383 x 96 x 310 mm (15,1"x3,8"x12,2") 11,4 L/dm³
Operating Noise	28 / 26 dB in Eco Mode
Weight	8,20 kg / 17,64 lbs.
Keystone	Vert.: +/-30° automatisch Hori.: +/-30°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 24-120 Hz
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²

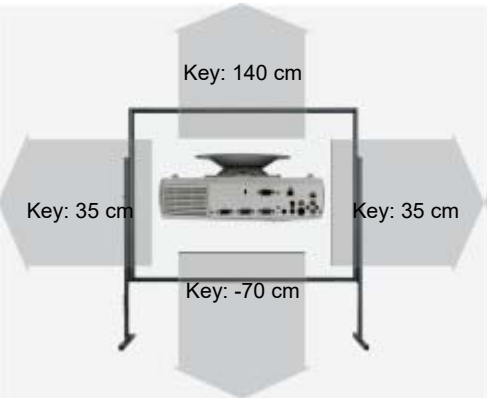

Features
- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- BrilliantColor™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector

Optional

Lamp original	UC.JQX11.001
Wall bracket original	MC.JBG11.004

Order here: https://www.hcinema.de/lampen/shop-en.php?id=9002478

Status: 2019 Discontinued (EOL) // Last update of the data: 2024-06-19
Created: 2019-02-26 23:03:45

Data



Bild

More Details

HCinema
https://www.projector-database.com/pro/acerul5210-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.