
H-PEC H 3010N




Brief Introduction Beta 2.5	The H-PEC H 3010N standard portable LCD projector has 3000 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of up to 477 cm thanks to the 3000 Ansi lumens. In room light, however, the image width should ideally be less than 318 cm. It was launched in 2012 and is no longer offered by the manufacturer H-PEC.
Display Type	3 x LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	3000
Projector: Contrast	500:1 full on/off
Projector: Black Level	6,0000 min. Lumen
Projector: Offset	-
Screen: Ansi-Lumen	1000 Lux (bei 200 cm Screen)
Screen: Contrast	500:1 full on/off
Screen: Black Level	2,012 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	230 / 200W im Eco Mode Lamp
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,65-1,93 f=18,53-22,18 mm
Throw Ratio	1,45-1,73:1
Audio	1 x 8W
Connections	DVI-I in D-sub 15 pin in und out S-Video in Cinch Video in Cinch Stereo in RS232C Din 9 pin in USB Typ B
Ceiling Mounting	Yes
Power	310W
Size WxHxD	325 x 97 x 260 mm (12,8"x3,8"x10,2") 8,2 L/dm³
Operating Noise	33 dB in Eco Mode

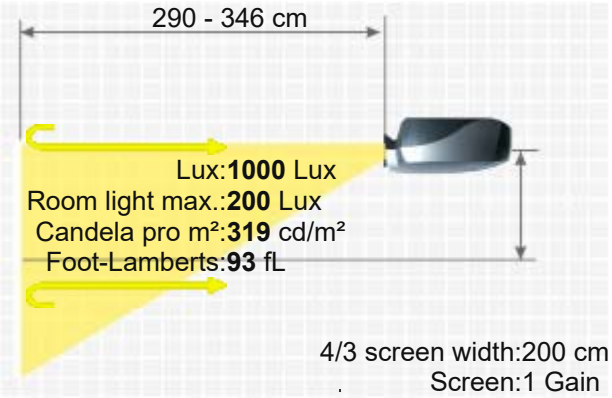

Key: 167 cm

H-PEC H 3010N

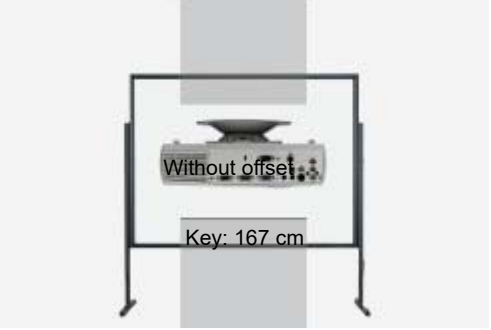

Weight	3,30 kg / 7,28 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 31-92 kHz V-sync: 48-120 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Remote control with laser pointer
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/HPECH3010N-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.