
ACTO LX643W



With the LX643W, manufacturer ACTO offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 3200:1. The lamp has a service life of up to 4000 hours, which is over 5.5 years if enjoyed for two hours a day. 444 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 296 cm. It is also Full HD 1080P compatible. The model was built by ACTO in 2012 and is no longer current.

Brief Introduction Beta 2.5		
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display	
	Projector	Screen
Ansi-Lumen	2600	867 Lux (bei 200 cm Screen)
Contrast	3200:1 full on/off	3200:1 full on/off
Black Level	0,8125 min. Lumen	0,271 min. Lumen
Offset	-	
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed	
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.	
Light Source	220W Lamp	
Light Life	4000 h. 5000 h. in Eco Mode	
Operating Costs	-	
Focus	Manual	
Zoom	No Zoom	
Objective	-	
Throw Ratio	-	
Audio	2 x 3W	
Connections	HDMI in D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in Mini Jack Audio in und out USB in	
Ceiling Mounting	Yes	
Power	280W	
Size WxHxD	327 x 87 x 241 mm (12,9"x3,4"x9,5") 6,86 L/dm³	
Operating Noise	34 / 29 dB in Eco Mode	
Weight	3,70 kg / 8,16 lbs.	
Keystone	-	
Illumination	85%	
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz	

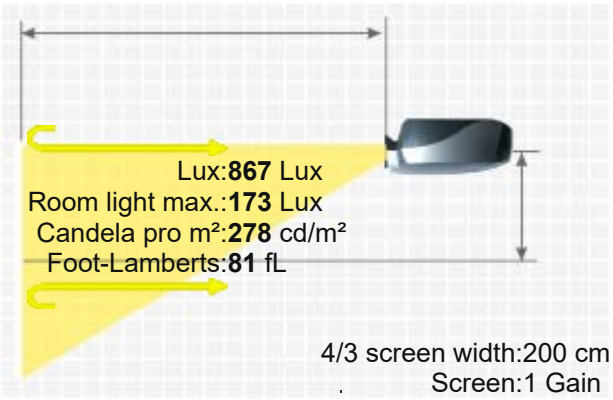

ACTO LX643W

Foot-Lamberts	81 fL / max. 444 cm screen width
	278 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/actolx643w-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.