ASK Proxima C250



ASK PROXIMA C250

Brief Introduction Beta 2.5	The standard portable ASK Proxima C250 BrilliantColor DLP projector has 2500 Ansi lumens, a contrast of 1400:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes image adjustment childs play. A picture width of up to 435 cm is possible. However, the picture should be smaller in room light. We recommend max. 290 cm. The model was built by ASK Proxima in 2007 and is no longer current.
Display Type	1 x 0,7" DDR DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	2500 / 1800 im Eco Mode
Contrast	1400:1 full on/off
Black Level	1,7857 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	220 / 160W im Eco Mode Lamp Articel Nr.: SP-LAMP-026
Light Life	2000 h. 3500 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,3-2,7 f=23,6-28,25 mm
Throw Ratio	1,83-2,27:1
Audio	1 x 3W Mono
Connections	DVI M1DA D-Sup 15 pin in und out S-Video in Cinch Video in Mini jack Audio in und out RS232C
Ceiling Mounting	Yes

Projector

Screen

833 Lux (bei 200 cm Screen)
1400:1 full on/off
0,596 min. Lumen

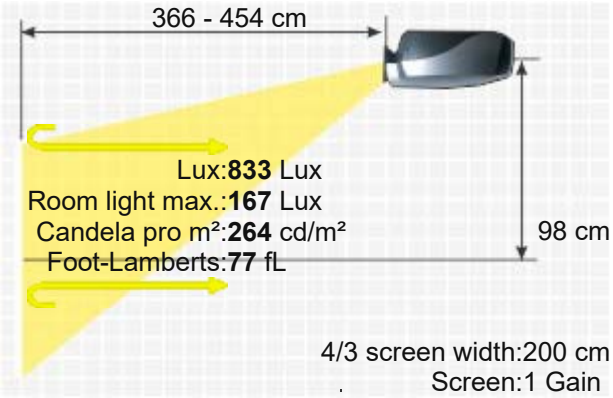



Power	272 / 205W in Eco Mode
Size WxHxD	263,1 x 74,4 x 132,3 mm (10,4"x2,9"x5,2") 2,57 L/dm³
Operating Noise	35 / 32 dB in Eco Mode

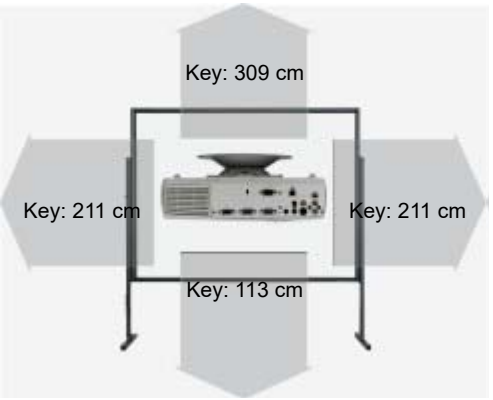

Weight	2,27 kg / 5 lbs.
Keystone	Vert.: +/-30° Hori.: +/-30°
Illumination	-
Frequenz	H-sync: 15,6-85 kHz V-sync: 48-85 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²
Features	■ Blank (Black screen button) ■ Eco Mode ■ BrilliantColor™ ■ Overscan adjustable ■ 6-segment colour wheel.

Optional

Lamp ruby	Ruby-LMP16364
Lamp original	SP-LAMP-026
Compatible lamp	LMP-K16364
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=d18097

Status: 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema

https://www.projector-database.com/pro/askproximac250-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.