ASK Proxima E1610




3LCD 360° Projektion Netzwerk

Brief Introduction Beta 2.5	With the E1610, manufacturer ASK Proxima offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The lamp life is specified by the manufacturer as 4000 hours, which is over 5.5 years if enjoyed for two hours a day. 6100 Ansi lumens ensure that a picture width of 680 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 453 cm. Furthermore, it is Full HD 1080P compatible and can even project Blu-rays onto the ceiling thanks to 360Â° projection. The model was built by ASK Proxima in 2012 and is no longer current.
Display Type	3 x 0,8" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	6100	2033 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	2000:1 full on/off
Black Level	3,0500 min. Lumen	1,018 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Very large screen width and rooms with plenty of light and shaded daylight.
Light Source	330W Lamp
Light Life	4000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	-
Zoom	-
Objective	F=1,7-2,2 f=21,3-34,16 mm
Throw Ratio	1,37-2,18:1
Audio	7W Mono
Connections	HDMI in D-sub 15 pin in und out 5 x BNC RGBHV in S-Video in Cinch Video in Cinch Stereo in RS232C RJ45 in Mini Jack Audio in und out
Ceiling Mounting	Yes
Power	490W
Size WxHxD	535 x 190 x 390 mm (21,1"x7,5"x15,4") 39,64 L/dm³
Operating Noise	38dB
Weight	10,80 kg / 23,81 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	90%

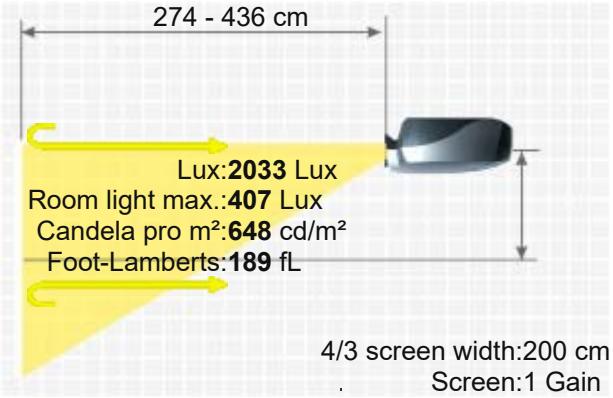



ASK PROXIMA E1610

Frequenz	H-sync: 15-100 kHz V-sync: 48-100 Hz
Foot-Lamberts	189 fL / max. 680 cm screen width 648 cd/m²
Features	■ Full HD 1080P compatible ■ User logo ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ 360° installable ■ Password protection ■ Lan network compatible.
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/askproximae1610-en.html



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.