ASK Proxima E1800




3LCD | 360° Projektion | Lens Shift

Brief Introduction Beta 2.5	A brief introduction to the E1800: The ASK Proxima LCD projector offers 5200 Ansi lumens, a contrast of 2000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer ASK Proxima specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. The built-in lens shift and keystone correction function provides freedom when setting up. Thanks to the brightness of 5200 Ansi lumens, a picture width of 733 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 489 cm). It is also Full HD 1080P compatible. Even projection onto the ceiling is possible thanks to the 360Â° projection. The model was built by ASK Proxima in 2012 and is no longer current.
Display Type	3 x 0,79" LCD TFT Panel WUXGA 16/9 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	5200	2311 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	2000:1 full on/off
Black Level	2,6000 min. Lumen	1,157 min. Lumen

Lens shift	Vert.: +50% -0% Hori.: +/-10%
Resolution	WUXGA 1920 x 1200 2.304.000 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	330W Lamp
Light Life	4000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	-
Zoom	-
Objective	F=1,7-2,2 f=22-35 mm
Throw Ratio	1,37-2,18:1
Audio	7W Mono
Connections	HDMI in D-sub 15 pin in und out 5 x BNC RGBHV in S-Video in Cinch Video in Cinch Stereo in RS232C
Ceiling Mounting	Yes
Power	490W
Size WxHxD	535 x 190 x 390 mm (21,1"x7,5"x15,4") 39,64 L/dm³
Operating Noise	38dB
Weight	10,80 kg / 23,81 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	90%

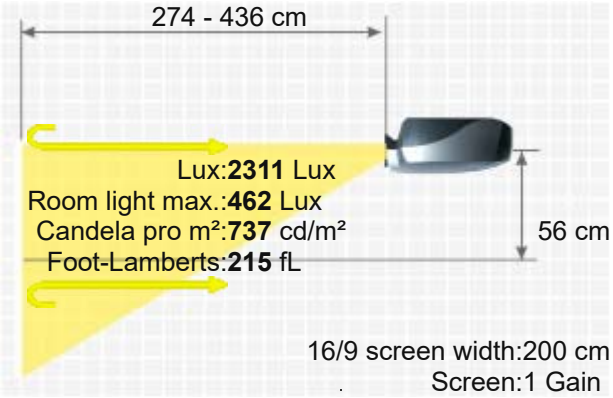



Frequenz	H-sync: 15-100 kHz V-sync: 48-100 Hz
Foot-Lamberts	215 fL / max. 733 cm screen width 737 cd/m²
Features	■ Full HD 1080P compatible ■ Lens shift Funktion ■ User logo ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ 360° installable ■ Password protection ■ Lan network compatible.
Status Data	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/askproximae1800-en.html



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.