
ASK Proxima M22



Brief Introduction Beta 2.5	The ASK Proxima M22 BrilliantColor DLP projector has 2200 Ansi lumens, a contrast of 1800:1 and a WXGA 1280 x 800 resolution. An image width of up to 477 cm is possible as the projector has 2200 Ansi lumens. However, if room light is available, the picture should be max. 318 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by ASK Proxima in 2008 and is no longer current.
Display Type	1 x 0,65" DLP Chip WXGA 16/10 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	2200 / 1650 im Eco Mode
Projector: Contrast	1800:1 full on/off
Projector: Black Level	1,2222 min. Lumen
Screen	880 Lux (bei 200 cm Screen) 1800:1 full on/off 0,49 min. Lumen
Offset	
Resolution	WXGA 1280 x 800 1.024.000 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Micro-Portabel | Mobile presentations and external training. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	165 / 132W im Eco Mode Lamp Articel Nr.: LMP19215
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,1
Objective	-
Throw Ratio	1,55-1,70:1
Audio	1W Mono
Connections	D-sub 15 pin in S-Video in Cinch Video in Mini Jack Audio in
Ceiling Mounting	Nein
Power	185W
Size WxHxD	210,8 x 62,5 x 182,9 mm (8,3"x2,5"x7,2") 2,37 L/dm³
Operating Noise	35dB
Weight	1,25 kg / 2,76 lbs.
Keystone	Vert.: +/-30°
Illumination	-
Frequenz	H-sync: 31-92 kHz V-sync: 50-85 Hz
Foot-Lamberts	82 fL / max. 477 cm screen width 281 cd/m²



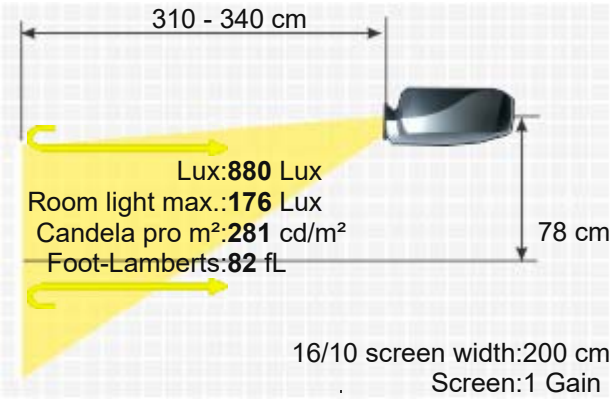

ASK PROXIMA M22

Features	■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ BrilliantColor™ ■ 5 Segment Colour Wheel

Optional		
	Bulb only Osram	NLMP19215
	Lamp original	LMP19215
	Universal Remote original	Fernb-uni-V3

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n19215

Status Data: 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: HCinema https://www.projector-database.com/pro/askproximam22-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.