

ASK Proxima S1220



Brief Introduction

Beta 2.5

A brief introduction to the ASK Proxima S1220. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 3000:1. As it is a short-throw projector, the projector can be positioned very close to the wall. For a 2 m wide image, the projector only needs to be 126 cm away from the screen. Playing 1080P is also no problem for the projector. The model was built by ASK Proxima in 2012 and is no longer current.

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

3500

1167 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

1,1667 min. Lumen

0,389 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

230W USHIO Lamp

Light Life

3000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=1,8 f=8,08mm

Throw Ratio

0,63:1

Audio

-

Connections

HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes

Power

280W

Size WxHxD

361,5 x 92 x 314,20 mm (14,2"x3,6"x12,4") 10,43 L/dm³

Operating Noise

34 / 29 dB in Eco Mode

Weight



3,70 kg / 8,16 lbs.

Keystone

Vert.: +/-30°

Illumination

85%

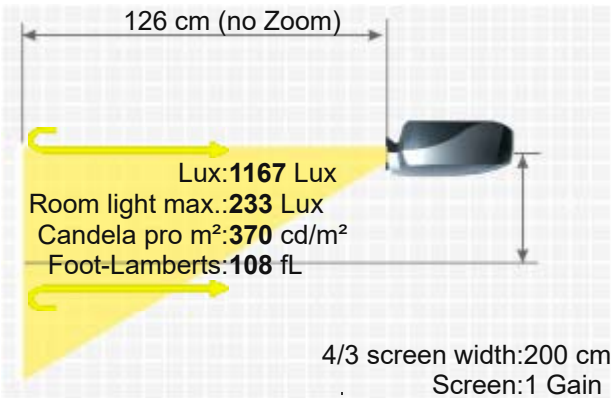

Key: 73 cm

Frequenz H-sync: 15-100 kHz
V-sync: 50-100 Hz

Foot-Lamberts 108 fL / max. 515 cm screen width

370 cd/m²

- Features
- Full HD 1080P compatible
 - Eco Mode
 - Lan network compatible.
 - Short-throw projector

Status Data 2012 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/askproximas1220-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.