Benq MH606



BENQ MH606

Brief Introduction Beta 2.5	The MH606 3D DLP projector from Benq has 3500 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. The manufacturer Benq specifies a lamp life of 10000 hours, which converts to over 13.7 years at 2 hours per day. 3500 Ansi lumens ensure that a picture width of 601 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 401 cm. Furthermore, the projector can play 1080P and 3D without any problems. The model was built by Benq in 2017 and is no longer current.
Display Type	1 x 0,55" DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3500 / Screen: 1556 Lux (bei 200 cm Screen)
Contrast	Projector: 10000:1 / Screen: 10000:1
Black Level	Projector: 0,3500 min. Lumen / Screen: 0,156 min. Lumen
Offset	-
Resolution	HDTV 1920 x 1080 2.073.600 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	200W Lamp Articel Nr.: 5J.JGX05.001
Light Life	5000 h. / 10000 h. in Eco Mode
Operating Costs	9,52% / 0,04 €
Focus	Manual
Zoom	Manual 1,1
Objective	F=2,56-2,68 f=22-24 mm
Throw Ratio	1,49-1,64:1
Audio	1 x 2W
Connections	2 x HDMI in D-sub 15pin in und out Cinch Video in S-Video in Mini Jack Audio in und out USB in RS232C Din 9 pin in
Ceiling Mounting	Yes

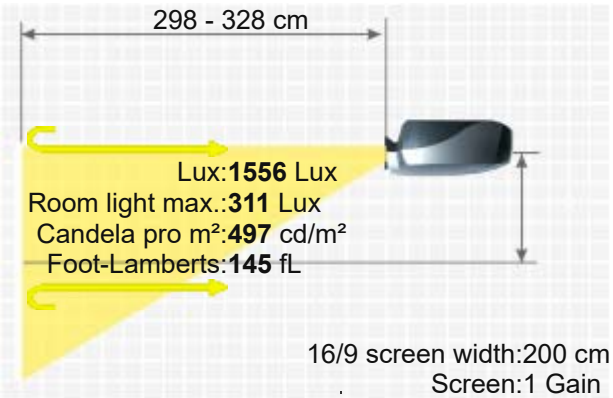

Power	280W / 210W in Eco Mode
Size WxHxD	296 x 120 x 221 mm (11,7"x4,7"x8,7") 7,85 L/dm³
Operating Noise	33 / 29 dB in Eco Mode

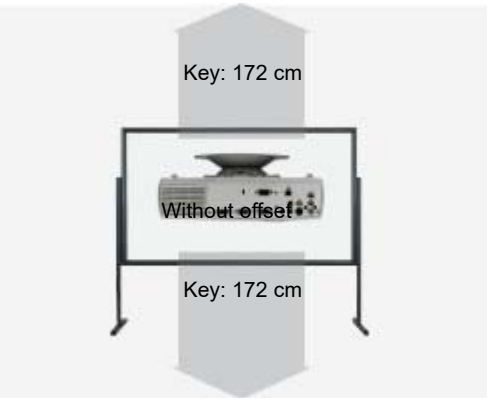

Weight	2,30 kg / 5,07 lbs.
Keystone	Vert.: +/-30°
Illumination	-
Frequenz	H-sync: 15-102 kHz V-sync: 23-120 Hz
Foot-Lamberts	145 fL / max. 601 cm screen width 497 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Eco Mode ■ Kensington Slot ■ Optional Wi-Fi network compatible.

Optional	
Lamp original	5J.JGX05.001
Remote control original	5J.JGV06.001, RCX014

Order here: https://www.hcinema.de/lampen/shop-en.php?id=24544

Status: 2017 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2019-09-11 21:55:02

Data



More Details

HCinema
https://www.projector-database.com/pro/benqmh606-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.