
Benq MX810ST





BENQ MX810ST


Brief Introduction Beta 2.5	The Benq MX810ST is a DLP projector with XGA 1024 x 768 resolution and a contrast ratio of 4600:1, including an integrated media player for direct file playback. As it is a short-throw projector, the projector can be placed very close to the wall. For a 2 m wide image, the projector only needs to be 122 cm away from the screen. The projector is equipped with a microphone jack plug and 10W speakers, so no additional speakers are required for presentations or training sessions. Playing 1080P is also no problem for the projector. The model was built by Benq in 2010 and is no longer current.
Display Type	1 x DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 2500 / Screen: 833 Lux (bei 200 cm Screen)
Contrast	Projector: 4600:1 full on/off / Screen: 4600:1 full on/off
Black Level	Projector: 0,5435 min. Lumen / Screen: 0,181 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Disc Recognition	**Media player formats:** • JPEG(JPEG) • PNG • TIFF • BMP • GIF DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Short Distance | Medium screen width or rooms with little light, max. 100 lumens.
Light Source	210W Lamp Articel Nr.: 5J.J3L05.001
Light Life	3500 h. 5000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	F=2,6
Throw Ratio	0,61:1
Audio	2 x 10W
Connections	2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in Mini Jack Audio in und out Mikrofon in RJ45 in USB Typ B in 12V Tigger out

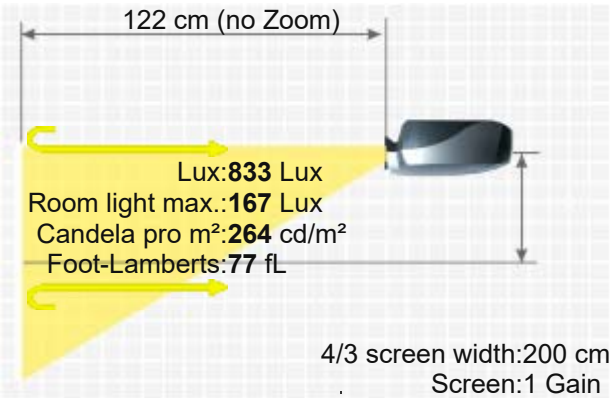

RS232C



Ceiling Mounting	Yes
Power	296W
Size WxHxD	290 x 128 x 252 mm (11,4"x5"x9,9") 9,35 L/dm³
Operating Noise	35 / 30 dB in Eco Mode

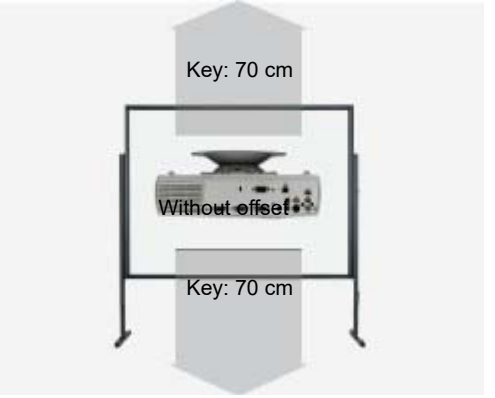

Weight	3,40 kg / 7,5 lbs.
Keystone	Vert.: +/-30°
Illumination	-
Frequenz	H-sync: 31-99 kHz V-sync: 48-120 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²

Features

- Full HD 1080P compatible
- Integrated Mediaplayer
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- BrilliantColor™
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- Digital Zoom (x2)

Optional


Osram bulb only	NLMP19883
Lamp ruby	Ruby-LMP19883
Lamp original	5J.J3L05.001
Compatible lamp	LMP-K19883
Universal Remote original	Fernb-uni-V3
Remote control original	5J.JAD06.001 / 5J.JAC06.001 / RCE012 / RCE011
Ceiling Mount 100-120	Halterung100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n19883

Status

2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

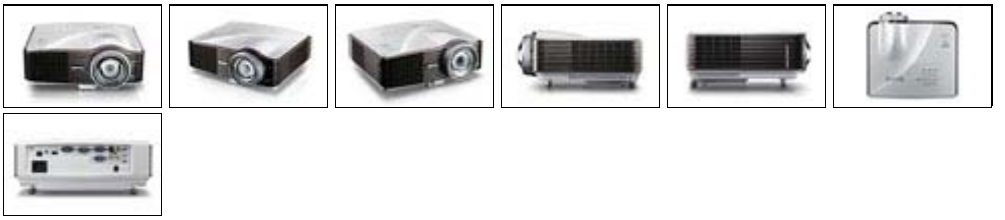

More Details

HCinema

https://www.projector-database.com/pro/benqmx810st-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.