Boxlight CP 740e




BOXLIGHT CP 740E


Brief Introduction Beta 2.5	A brief introduction to the CP 740e: The Boxlight LCD projector offers 2500 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. The projector will be able to illuminate a picture width of 435 cm well. However, if room light is available, the picture width should ideally not exceed 290 cm. The model was built by Boxlight in 2004 and is no longer current.
Display Type	3 x 0,7" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2500	833 Lux (bei 200 cm Screen)
Contrast	500:1 full on/off	500:1 full on/off
Black Level	5,0000 min. Lumen	1,676 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600×1200 compressed
Video Modes	SECAM, NTSC, HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W Lamp Articel Nr.: CP740E-930
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,75-2,1 f=26,7-32 mm
Throw Ratio	1,88-2,25:1
Audio	1 x 2W
Connections	DVI-I D-sub 15pin in und out Cinch Video in S-Video in Mini Jack in USB RS232C
Ceiling Mounting	Yes
Power	275W

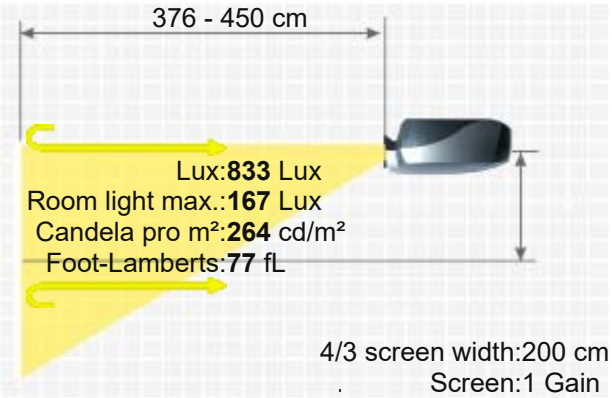

Size WxHxD	281,9 x 94 x 289,6 mm (11,1"x3,7"x11,4") 7,63 L/dm³
Operating Noise	32 / 27 dB in Eco Mode

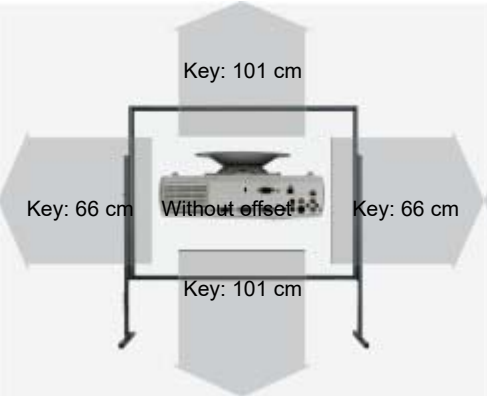

Weight	3,17 kg / 6,99 lbs.
Keystone	Vert.: +/-15° Hori.: +/-10°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 43-100 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²
Features	■ Eco Mode ■ Kensington Slot ■ Picture-in-Picture ■ Remote control with mouse control ■

Optional		
	Bulb only	NLMP690
	Lamp original	CP740E-930

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n690

Status: 2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details

HCinema

https://www.projector-database.com/pro/boxlightcp740e-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.