

Canon LV 8215

CANON LV 8215



Brief Introduction

Beta 2.5

With the LV 8215, manufacturer Canon offers an LCD projector with WXGA 1280 x 800 resolution and a contrast of 450:1. The projector can illuminate an image width of up to 518 cm thanks to its 2600 Ansi lumens. In room light, however, the image width should ideally be less than 345 cm. The model was built by Canon in 2010 and is no longer current.

Display Type



3 x 0,59" LCD TFT Panel mit MLA

WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2600

1040 Lux (bei 200 cm Screen)

Contrast

450:1 full on/off

450:1 full on/off

Black Level

5,7778 min. Lumen

2,324 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.024.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

230W NSHA Lamp

Light Life

Articel Nr.: 3522B003AA / LV-LP31

3000 h.

Operating Costs

35,71% / 0,15 €

Focus

Manual

Zoom

Manual 1,16

Objective

F=1,7-2,0 f=19,8-23,7 mm

Throw Ratio

1,55-1,8:1

Audio

7W Mono

Connections

DVI-I mit HDCP in

D-sub 15 pin in und out

S-Video in

Cinch Video in

Cinch Stereo in

Mini Jack Audio in und out

RJ45 in

RS232C

Ceiling Mounting

Yes

Power


294 / 228W in Eco Mode

Size WxHxD

317 x 111 x 336 mm (12,5"x4,4"x13,2") 11,82 L/dm³

Operating Noise

35 / 29 dB in Eco Mode

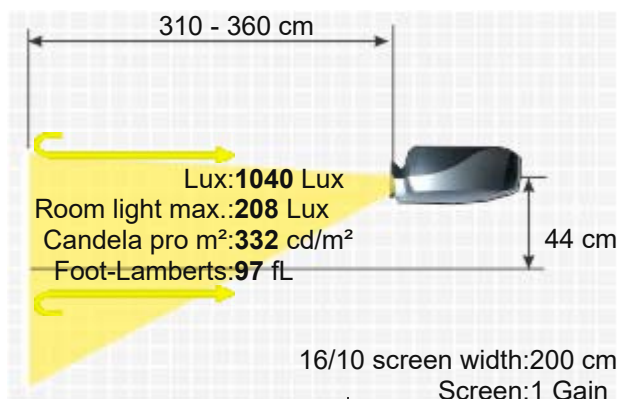

Key: 223 cm

Weight 3,30 kg / 7,28 lbs.
Keystone Vert.: +/-30° automatisch
Illumination 85%

Frequenz -

Foot-Lamberts 97 fL / max. 518 cm screen width
332 cd/m²

- Features
- Eco Mode
 - Automatic and manual vertical keystone correction
 - sRGB
 - Lan network compatible.

Optional	Bulb only	NLMP18986
	Lamp ruby	Ruby-LMP18986
	Lamp incl. air filter original	3522B003AA / LV-LP31
	Compatible lamp	LMP-K18983
	Universal Remote original	Fernb-uni-V3
	Air filter back original	24FU0381
	Air filter original	24FU0391
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19567>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/canonlv8215-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.