CineVersum 70






Brief Introduction Beta 2.5	Manufacturer CineVersum offers with the 70 a DLP projector with HDTV 1280 x 720 resolution and a contrast of 2000:1. The built-in lens shift function provides freedom when setting up. The projector can illuminate an image width of up to 321 cm thanks to its 1000 Ansi lumens. In room light, however, the picture width should ideally be less than 214 cm. The operating noise of just 30 decibels makes the projection quiet. The model was built by CineVersum in 2003 and is no longer current.
Display Type	1 x 0,8" HD2+ DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	1000
Contrast	2000:1 full on/off
Black Level	0,5000 min. Lumen
Lens shift	Vert.: +80% --25% manuell
Resolution	HDTV 1280 x 720 921.600 Pixel
Video Modes	NTSC, PAL, SECAM HDTV
Disc Recognition	DVD | ~~HD Blu-ray~~ | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W UHP Lamp
Light Life	1500 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,31
Objective	f=32-42 mm
Throw Ratio	1,80-2,40:1
Audio	Nein
Connections	1 Composite Video (RCA connector) 1 S-Video (4 pin mini DIN) 1 Component Video (3 x RCA connectors) 1 RGBHV or Component (5 x RCA connectors) 1 RGBHV (D15 VGA connector) 1 DVI input RS232 Control
Ceiling Mounting	Yes, is possible.
Power	-
Size WxHxD	449 x 156 x 420 mm (17,7"x6,1"x16,5") 29,42 L/dm³
Operating Noise	30dB
Weight	6,00 kg / 13,23 lbs.
Keystone	-
Illumination	90%
Frequenz	-

Projector / Screen


	Projector	Screen
Ansi-Lumen	1000	444 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	2000:1 full on/off
Black Level	0,5000 min. Lumen	0,222 min. Lumen

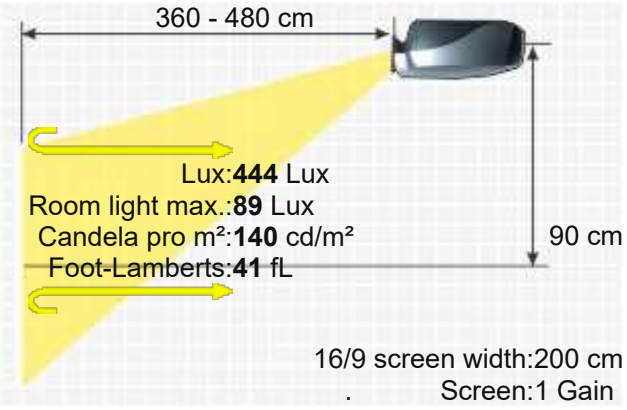



CINEVERSUM 70

Foot-Lamberts	41 fL / max. 321 cm screen width
	140 cd/m²
Features	■ Lens shift Funktion manuell ■ Freeze ■ Warping ■ Picture-in-Picture ■ 6-segment colour wheel 3x speed.
Screen Mirroring	-
In Test	-



Optional accessories



Deckenhalterung Länge 100-120 mm — Halterung120 — 47,86 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
CineVersum Objektiv 1	1.4-1.8:1	2.8-3.6 m	80--28%		

Status 2003 Discontinued (EOL) // Last update of the data: 2025-03-03

Data 

More Details

HCinema

https://www.projector-database.com/pro/cineversum70-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.