
Delta DP 3520




DELTA DP 3520

Brief Introduction Beta 2.5	A brief introduction to the DP 3520: The Delta DLP projector offers 2000 Ansi lumens, a contrast of 1800:1 and an XGA 1024 x 768 resolution. 2000 Ansi lumens ensure that a picture width of 389 cm is also possible. However, if room light is available, the picture should be a maximum of 259 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by Delta in 2007 and is no longer current.
Display Type	1 x 0,55" LVDS DDP2230 DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	2000 / 1500 im Eco Mode
Projector: Contrast	1800:1 full on/off
Projector: Black Level	1,1111 min. Lumen
Screen	667 Lux (bei 200 cm Screen) 1800:1 full on/off 0,371 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200 / 160W im Eco Mode Lamp
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,15
Objective	-
Throw Ratio	1,9-2,2:1
Audio	2W Mono
Connections	2 x D-sub 15pin in 1 x out S-Video in Cinch Video in Stereo Cinch in Mini Jack Audio in USB Typ B in RS232C
Ceiling Mounting	Yes
Power	280 / 220W in Eco Mode
Size WxHxD	280 x 80 x 205 mm (11"x3,1"x8,1") 4,59 L/dm³
Operating Noise	36 / 31 dB in Eco Mode
Weight	2,54 kg / 5,6 lbs.
Keystone	Vert.: +/-15°
Illumination	80%
Frequenz	H-sync: 15-91,4 kHz V-sync: 43-78 Hz



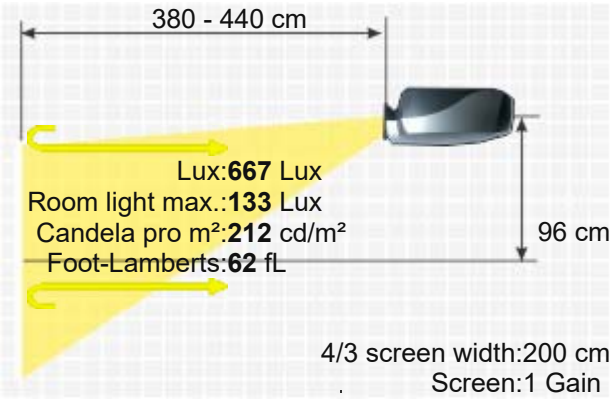

Foot-Lamberts	62 fL / max. 389 cm screen width
	212 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ 16x digital zoom.
Status	2007 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	



More Details

HCinema

https://www.projector-database.com/pro/deltadp3520-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.