
Delta DP 3600



Brief Introduction Beta 2.5	The standard portable DP 3600 DLP projector from Delta has 1700 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a 359 cm image width well. However, if room light is available, the image width should ideally not exceed 239 cm. The model was built by Delta in 2006 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	1700 / 1500 im Eco Mode
Projector: Contrast	2000:1 full on/off
Projector: Black Level Offset	0,8500 min. Lumen
Screen	567 Lux (bei 200 cm Screen) 2000:1 full on/off 0,284 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W Lamp Articel Nr.: LMP18151
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	30,95% / 0,13 €
Focus	Manual
Zoom	Manual 1,22
Objective	-
Throw Ratio	1,64-2,0:1
Audio	2W Mono
Connections	DVI-I D-sub 15pin in und out S-Video in Cinch Video in Cinch Stereo in Mini jack in USB RS232C
Ceiling Mounting	Yes
Power	255 / 230W in Eco Mode
Size WxHxD	328 x 88 x 238 mm (12,9"x3,5"x9,4") 6,87 L/dm³
Operating Noise	34 / 31 dB in Eco Mode
Weight	3,54 kg / 7,8 lbs.
Keystone	Vert.: +/-15°
Illumination	85%



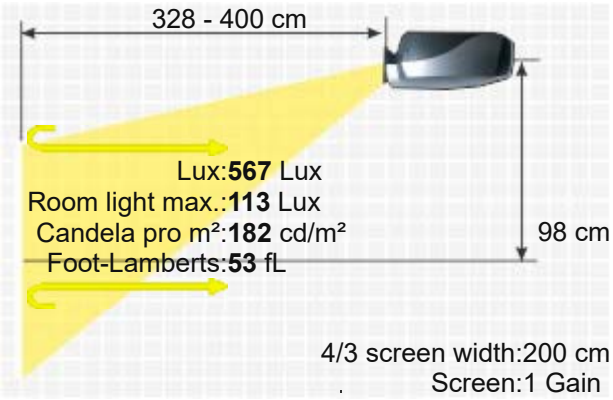

DELTA DP 3600

Frequenz	H-sync: 15-90 kHz V-sync: 50-85 Hz
Foot-Lamberts	53 fL / max. 359 cm screen width
	182 cd/m²
Features	■ Eco Mode
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	



More Details

HCinema

https://www.projector-database.com/pro/deltadp3600-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.