

Dukane ImagePro 6540

DUKANE IMAGEPRO 6540



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

With the ImagePro 6540, manufacturer Dukane offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 10000:1. The built-in ambient light sensor detects the ambient light in the room and automatically optimizes the image. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The projector is equipped with a microphone jack plug and 20W speakers, so no additional speakers are required for presentations or training courses. The projector can illuminate images up to 551 cm wide thanks to its 4000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 367 cm is recommended. The model is also Full HD 1080P and 3D compatible. The model was built by Dukane in 2014 and is no longer current.



1 x 0,55" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip


Projector

4000
10000:1 full on/off
0,4000 min. Lumen

Screen

1333 Lux (bei 200 cm Screen)
10000:1 full on/off
0,133 min. Lumen

XGA 1024 x 768
786.432 Pixel
WUXGA 1920 x 1200 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Media player formats: JPEG
Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)
Standard-Portabel | External training and company presentations, as well as product presentations.
Wide screen width or rooms with plenty of light (over 200 lumens).
270 / 162W im Eco Mode Lamp
Articel Nr.: NP30LP
3500 h. 8000 in Eco Mode
14,29% / 0,06 €
Manual
No Zoom 1,7
F=2,4-3,1 f=17,09-29,05 mm
1,53-2,6:1
20W Mono
2 x HDMI in
D-sub 15pin in und out
Cinch Video in

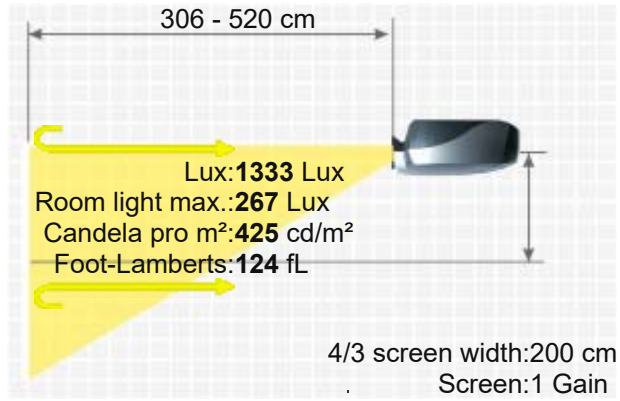

Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A,B in
RS232C Din 9 pin in
RJ45 in
Mikrofon in
Yes
335 / 246W in Eco Mode
368 x 97,5 x 286 mm (14,5"x3,8"x11,3") 10,21 L/dm³
39 / 33 dB in Eco Mode

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

3,50 kg / 6,61 lbs.
Vert.: +/-30°
-

Frequenz

H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts

124 fL / max. 551 cm screen width
425 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Integrated Mediaplayer
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Password protection
- Lan network compatible.
- Crestron®-Software compatible.
- Ambient Light Sensor.
- Digital Zoom
- Dicom Simulation

Optional

Lamp original NP30LP / 100013543
Remote control original 7N901053 / RD-469E / 7N900881 / RD-443E

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22359>
2014 Discontinued (EOL) // Last update of the data: 2023-08-12
Created: 2014-06-04 14:54:24

Data

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro6540-en.html>

