Dukane ImagePro 6540HDA



DUKANE IMAGEPRO 6540HDA

Brief Introduction Beta 2.5	The ImagePro 6540HDA 3D DLP projector from Dukane has 4000 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. The integrated media player allows files to be played directly. The horizontal and vertical keystone correction provides leeway when setting up. As the ImagePro 6540HDA is equipped with a microphone jack plug and 20W speakers, no additional audio system is required for presentations or training courses. 643 cm image width, the projector will be able to illuminate well. The projector can manage rooms with residual light with a smaller image width, we would recommend a maximum of 429 cm here. Playing 1080P and 3D is also no problem for the projector. The model was built by Dukane in 2014 and is no longer current.
Display Type	1 x 0,65" DLP Chip HDTV 16/9 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 4000 / Screen: 1778 Lux (bei 200 cm Screen)
Contrast	Projector: 10000:1 full on/off / Screen: 10000:1 full on/off
Black Level Offset	Projector: 0,4000 min. Lumen / Screen: 0,178 min. Lumen
Resolution	HDTV 1920 x 1080 2.073.600 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p **Media player formats:** JPEG
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source Light Life	270 / 162W im Eco Mode Lamp 3500 h. 8000 in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	No Zoom 1,7
Objective	F=2,4-3,1 f=17,09-29,05 mm
Throw Ratio	1,2-2,04:1
Audio	20W Mono
Connections	2 x HDMI in D-sub 15pin in und out Cinch Video in Cinch Stereo in

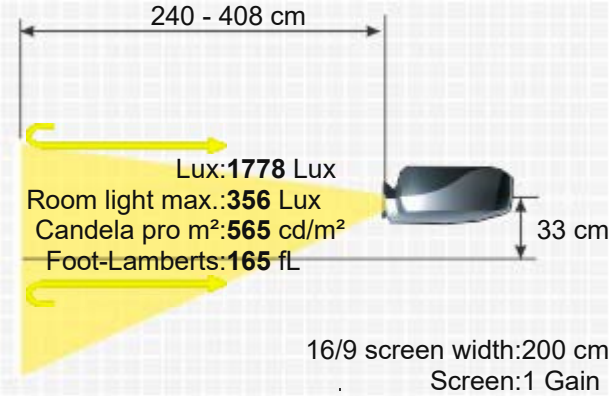

	S-Video in Mini Jack Audio in und out USB Typ A,B in RS232C Din 9 pin in RJ45 in Mikrofon in
Ceiling Mounting	Yes
Power	338 / 221W in Eco Mode
Size WxHxD	368 x 108 x 292 mm (14,5"x4,3"x11,5") 11,61 L/dm³
Operating Noise	39 / 33 dB in Eco Mode
Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-30° Hori.: +/-25°
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	165 fL / max. 643 cm screen width 565 cd/m²
Features	■ Real Full HD 3D ■ Full HD 1080P compatible ■ Integrated Mediaplayer ■ Freeze ■ User logo ■ Eco Mode ■ Kensington Slot ■ Password protection ■ Lan network compatible. ■ Crestron®-Software compatible. ■ Digital Zoom ■ Dicom Simulation
Status	2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2017-05-02 14:54:12
More Details	https://www.projector-database.com/pro/dukaneimagepro6540hda-en.html

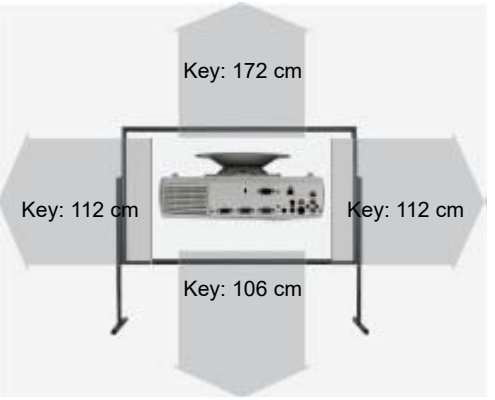

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.