Eiki LC NB3S




3LCD Motor Pointer USB


Brief Introduction Beta 2.5	A brief introduction to the Eiki LC NB3S. The standard portable LCD projector has an SVGA 800 x 600 resolution and a contrast of 350:1. The horizontal and vertical keystone correction provides leeway when setting up. Thanks to the brightness of 1700 Ansi lumens, a picture width of 359 cm is possible. In room light, the picture should be max. 239 cm wide. The model was built by Eiki in 2002 and is no longer current.
Display Type	3 x 0,9" LCD TFT Panel mit MLA SVGA 4/3 Liquid Crystal Display with Micro Lense Array

	Projector	Screen
Ansi-Lumen	1700	550 Lux (bei 203 cm Screen)
Contrast	350:1 full on/off	350:1 full on/off
Black Level	4,8571 min. Lumen	1.585 min. Lumen
Offset		


Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	PAL/PAL-M&N/SECAM/NTSC/NTSC4.43
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	200W UHP (long life) Lamp Articel Nr.: 610-293-2751
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,2
Objective	F=1,9-2,1 f=21,3-25,6 mm
Throw Ratio	1,16-1,4:1
Audio	1 x 1W

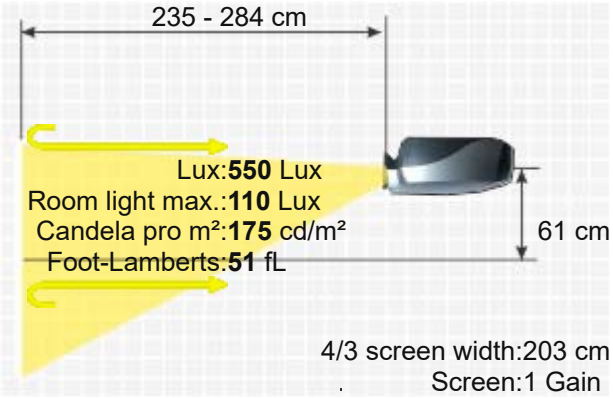

Connections	**Computer-Eingänge** 1 x D-SUB 151 x 3,5 mm Klinke (Stereo) für Audio **AV-Eingänge** 3 x RCA (Y/Video, Pb/Cb, Pr/Cr), 1 x S-Video, 2 x RCA (Audio- R, L) **Weitere Anschlüsse:** 1 x D-SUB 15 Monitorausgang1 x DIN 8 Pin für Maussteuerung und serielle Schnittstelle1 x USB Typ B2 x RCA (Audio- R, L)
Ceiling Mounting	Yes
Power	300W
Size WxHxD	333 x 89,5 x 260,9 mm (13,1"x3,5"x10,3") 7,71 L/dm³
Operating Noise	37dB

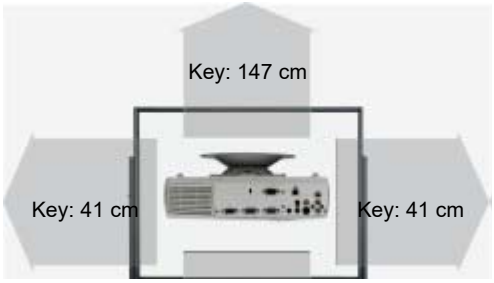

Weight	3,90 kg / 8,6 lbs.
Keystone	Vert.: +/-20° Hori.: +/-10°
Illumination	85%
Frequenz	H-sync: 15-80 kHz V-sync: 50-100 Hz Range max.: 100 MHz
Foot-Lamberts	51 fL / max. 359 cm screen width



175 cd/m²

Features

- Freeze
- Kensington Slot
- Gamma correction
- Remote control with laser pointer und mouse control

Optional

Philips bulb only	NLMP3370
Lamp ruby	Ruby-LMP3370
Lamp original	610-293-2751 / LMP35 / ET-SLMP35
Compatible lamp	LMP-K1303
Universal Remote original	Fernb-uni-V3
Remote control original	945 047 7882 / CXJY

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n1304

Status Data: 2002 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: https://www.projector-database.com/pro/eikilcnb3s-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.