
Elmo CRP 22



ELMO CRP 22

Brief Introduction Beta 2.5	The Elmo model CRP 22 is an LCD projector with XGA 1024 x 768 resolution and a contrast of 500:1. The projector can illuminate images up to 408 cm wide thanks to its 2200 Ansi lumens. In room lighting, however, the image width should ideally be less than 272 cm. The model was built by Elmo in 2010 and is no longer current.
Display Type	3 x 0,55" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen (Projector)	2200 / 1606 im Eco Mode
Ansi-Lumen (Screen)	733 Lux (bei 200 cm Screen)
Contrast (Projector)	500:1 full on/off
Contrast (Screen)	500:1 full on/off
Black Level Offset (Projector)	4,4000 min. Lumen
Black Level Offset (Screen)	1,475 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	220W UHP Lamp
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,0-2,15 f=18,38-22,06 mm
Throw Ratio	1,62-1,92:1
Audio	1W Mono
Connections	D-sub 15 pin in S-video in Cinch Video in RS232C Din 9 pin
Ceiling Mounting	Yes
Power	215W in Eco Mode
Size WxHxD	333,5 x 94,2 x 247,0 mm (13,1"x3,7"x9,7") 7,73 L/dm³
Operating Noise	34 / 29 dB in Eco Mode
Weight	2,50 kg / 5,51 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 140 MHz
Foot-Lamberts	68 fL / max. 408 cm screen width 233 cd/m²



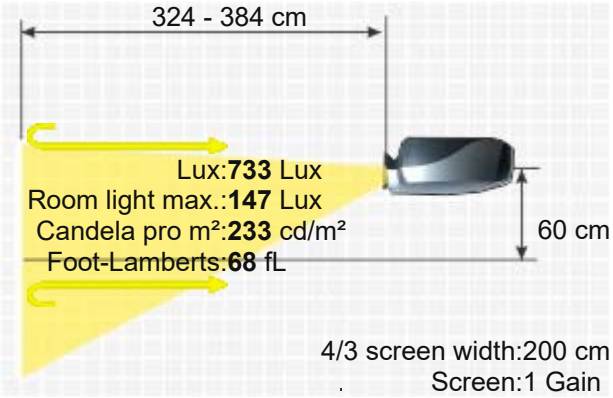

Features	■ Freeze ■ Blackboard Modus ■ User logo ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ Gamma correction ■ Password protection ■ PJLink™ ■
Status Data	2010 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/elmocrp22-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.