

Elmo MP 50EX




ELMO MP 50EX

Brief Introduction Beta 2.5	The stationary Elmo MP 50EX LCD projector has 3000 Ansi lumens and an XGA 1024 x 768 resolution. The horizontal and vertical keystone correction provides leeway when setting up. The projector can illuminate a picture width of up to 477 cm well thanks to the 3000 Ansi lumens. In room lighting, however, the picture width should ideally be less than 318 cm. The model was built by Elmo in 2004 and is no longer current.
Display Type	3 x 1,0" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 3000 / Screen: 971 Lux (bei 203 cm Screen)
Contrast	Projector: - / Screen: -
Black Level	Projector: - / Screen: -
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC,
Application	Stationär | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	260W UHP Lamp Articel Nr.: LMP4987
Light Life	1500 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,3-2,6 f=36-43,2 mm
Throw Ratio	1,77-2,13:1
Audio	1 x 1W
Connections	Analog RGB Input/Output Input Terminal (Image) Mini D-sub 15pins x 2 Output Terminal (Image) Mini D-sub 15pins x 1 Input Terminal (Sound) Stereo mini-jack x 2 Output Terminal (Sound) Stereo mini-jack x 1 Input Terminal (Image) RCA pin x 1, S-Video terminal (Mini DIN 4 pins x 1) Input Terminal (Sound) RCA pin (L/R) x 1
Ceiling Mounting	Nein
Power	390W
Size WxHxD	400 x 145 x 315 mm (15,7"x5,7"x12,4") 18,27 L/dm³
Operating Noise	-
Weight	7,30 kg / 16,09 lbs.
Keystone	Vert.: +/-15° Hori.: +/-10°
Illumination	-
Frequenz	H-sync: 21-80 kHz V-sync: 50-85 Hz
Foot-Lamberts	90 fL / max. 477 cm screen width

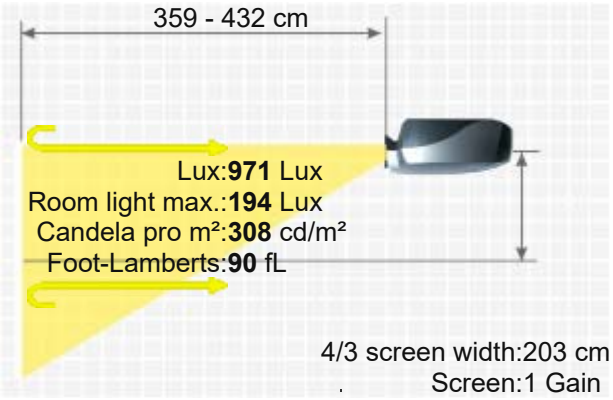

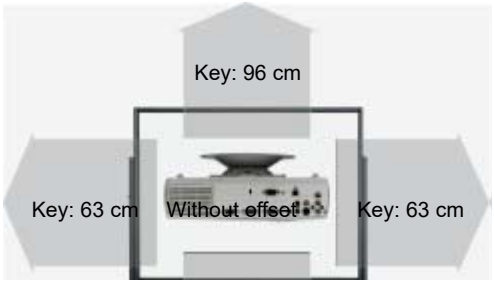



308 cd/m²

Features

- Document Camera 1/2-inch colour CCD 2,000,000 pixels
- Digital zoom 6.25X
- Rotation (rotate the image)

Optional

Lamp ruby	Ruby-LMP4987
Lamp original	LMP4987

Order here: https://www.hcinema.de/lampen/shop-en.php?id=d4987

Status Data: 2004 Discontinued (EOL) // Last update of the data: 2023-10-26

More Details

https://www.projector-database.com/pro/elmomp50e-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.