Epson EB W31




EPSON EB W31

Brief Introduction Beta 2.5	With the EB W31, manufacturer Epson offers an LCD projector with WXGA 1280 x 800 resolution and a contrast of 15000:1. The manufacturer specifies a lamp life of 5000 hours, which is over 6.8 years with two hours of use per day. Including an integrated media player with which files can be played directly. Horizontal and vertical keystone correction makes setting up the picture childs play. An image width of up to 575 cm is possible as the projector has 3200 Ansi lumens. However, if room light is available, the image should be max. 383 cm wide. The model was built by Epson in 2015 and is no longer current.
Display Type	3 x 0,59" LCD TFT Panel WXGA 16/10 Liquid Crystal Display
Ansi-Lumen	3200 / 2240 im Eco Mode
Contrast	15000:1 full on/off
Black Level	0,2133 min. Lumen
Offset	
Resolution	WXGA 1280 x 800 1.024.000 Pixel
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p **Media player formats:** jpg bmp gif png avi (Motion JPEG)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	200W UHE Lamp Articel Nr.: ELPLP88
Light Life	5000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,58-1,72 f=16,9-20,28 mm
Throw Ratio	1,30-1,56:1
Audio	2W Mono
Connections	HDMI in D-sub 15pin in Cinch Video in S-Video in Cinch Stereo in USB Typ A,B in RS232C Din 9 pin in


Projector

Screen	
1280 Lux (bei 200 cm Screen)	
15000:1 full on/off	
0,085 min. Lumen	

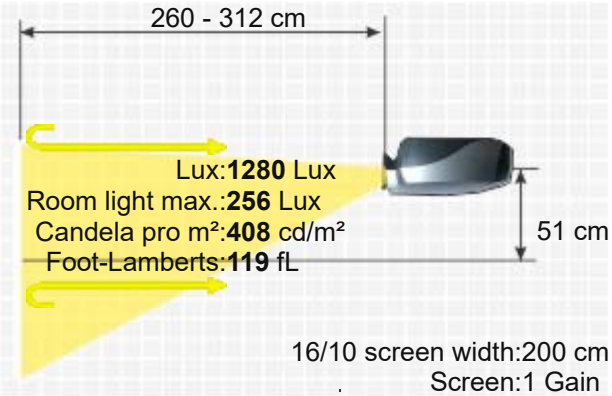



Ceiling Mounting	Yes
Power	277 / 207W in Eco Mode
Size WxHxD	234 x 77 x 297 mm (9,2"x3"x11,7") 5,35 L/dm³
Operating Noise	37 / 28 dB in Eco Mode

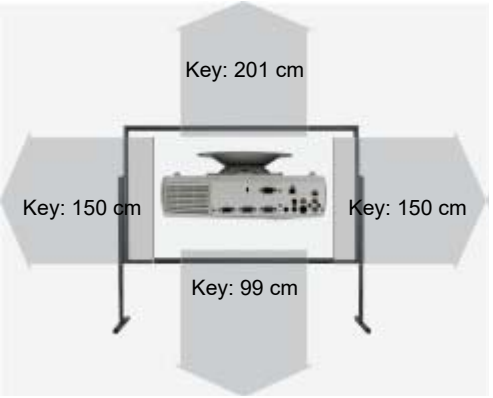

Weight	2,40 kg / 4,41 lbs.
Keystone	Vert.: +/-30° automatisch Hori.: +/-30°
Illumination	-
Frequenz	-
Foot-Lamberts	119 fL / max. 575 cm screen width 408 cd/m²

Features

- Integrated Mediaplayer
- Eco Mode
- Automatic and manual vertical keystone correction
- Optional Wi-Fi network compatible.

Optional

Lamp original	ELPLP88 / V13H010L88
2 air filter original	ELPAF32 / V13H134A32 / 1557759
Remote control original	1648806

Order here: https://www.hcinema.de/lampen/shop-en.php?id=23697

Status

2015 Discontinued (EOL) // Last update of the data: 2023-08-30

Data

Created: 2015-08-12 15:06:21

More Details

https://www.projector-database.com/pro/epsonebw31-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.