
Epson EB X8




Brief Introduction Beta 2.5	The Epson EB X8 standard portable LCD projector has 2500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. 2500 Ansi lumens ensure that a picture width of 435 cm is also possible. However, if room light is available, the picture should be a maximum of 290 cm wide. Furthermore, the projector can play 1080P without any problems. The model was built by Epson in 2009 and is no longer current.
Display Type	3 x 0,55" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	2500 / 2070 im Eco Mode	833 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	2000:1 full on/off
Black Level	1,2500 min. Lumen	0,417 min. Lumen
Offset		


Resolution	XGA 1024 x 768 786.432 Pixel SXGA+ 1400 x 1050 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W UHE Lamp Articel Nr.: ELPLP54
Light Life	4000 h. 5000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,18
Objective	F=1,6-1,7 f=17-20 mm
Throw Ratio	1,52-1,79:1
Audio	1W Mono

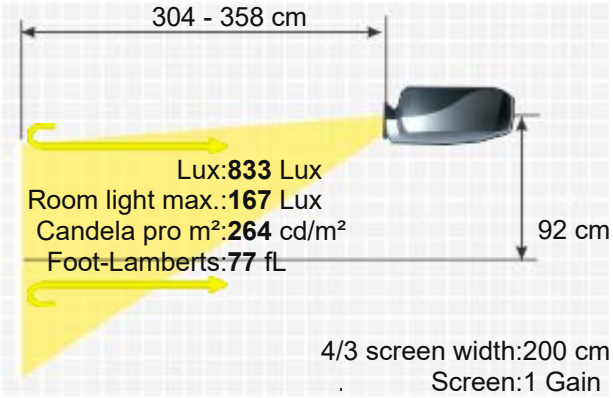

Connections	HDMI in D-sub 15 pin in S-Video in Cinch Video in Cinch Stereo in USB Typ A, B

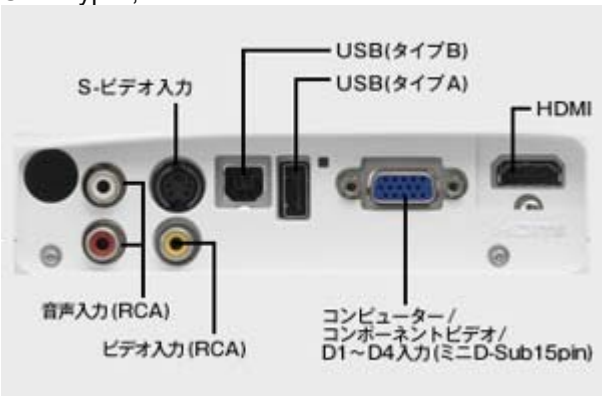

Ceiling Mounting	Yes
Power	280W
Size WxHxD	295 x 77 x 228 mm (11,6"x3"x9") 5,18 L/dm³
Operating Noise	37 / 29 dB in Eco Mode

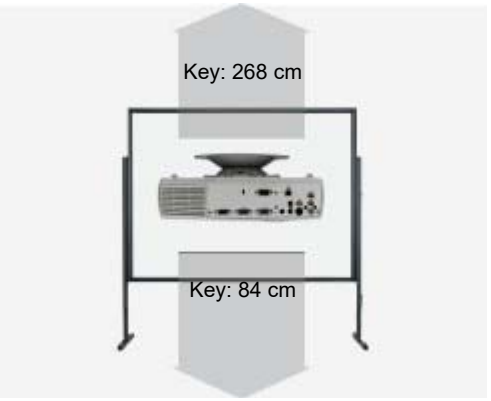

Weight	2,30 kg / 5,07 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 15-69 kHz V-sync: 50-85 Hz Range max.: 162 MHz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²

Features

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- sRGB
- Password protection
- Remote control with mouse control

Optional

Philips bulb only	NLMP19263
Lamp ruby	Ruby-LMP19263
Lamp original	ELPLP54 / V13H010L54
Compatible lamp	LMP-K19263
High performance air filter	Alternative zu:ELPAF25 / V13H134A25
Remote control original	1519442 / 1515068 / 154165301
2 air filter original	ELPAF25 / V13H134A25
Ceiling Mount 100-120	Halterung100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n19270

Status Data: 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: HCinema https://www.projector-database.com/pro/epsonebx8-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.