Everest ED P68



3LCD W.-Optiken USB

Brief Introduction Beta 2.5	The ED P68 LCD projector from Everest has 5000 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 5000 Ansi lumens, an image width of 616 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 411 cm). The model was built by Everest in 2009 and is no longer current.
Display Type	3 x 0,79" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	5000
Projector: Contrast	500:1 full on/off
Projector: Black Level Offset	10,0000 min. Lumen
Screen	1667 Lux (bei 200 cm Screen) 500:1 full on/off 3,354 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	330W NSH Lamp Articel Nr.: LMP-111
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,7-1,9 f=24,5-28,8 mm
Throw Ratio	1,5-1,8:1
Audio	1 x 8W Mono
Connections	DVI-I in D-sub 15 pin in und out 5 x BNC RGBHV in YUV in S-Video in Cinch Video in Mini Jack Audio in und out RS232C Din 9 pin in USB Typ B
Ceiling Mounting	Yes
Power	350W
Size WxHxD	480 x 152 x 360 mm (18,9"x6"x14,2") 26,27 L/dm³
Operating Noise	34 dB in Eco Mode
Weight	7,60 kg / 16,76 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	85%

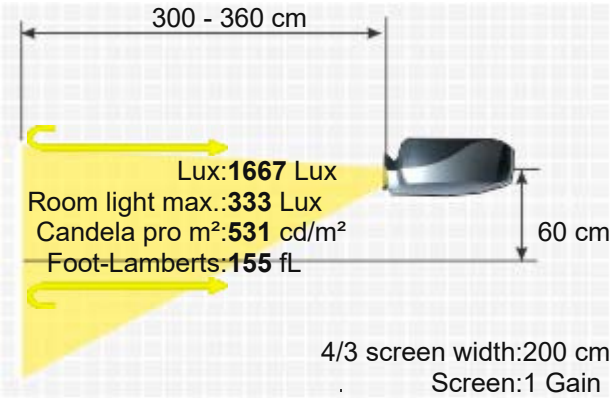



EVEREST ED P68

Frequenz	H-sync: 15-107 kHz V-sync: 10-120 Hz Range max.: 170 MHz
Foot-Lamberts	155 fL / max. 616 cm screen width 531 cd/m²
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Optional LAN network compatible.



Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELS-03	3.1-4.1:1	6.2-8.2 m	40% Fix		
ELS-02	2.3-2.9:1	4.6-5.8 m	40% Fix		
ELS-01	1.8-2.3:1	3.6-4.6 m	40% Fix		Manual

Status Data: 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: HCinema https://www.projector-database.com/pro/everestedp68-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.