

ACTO LX231

ACTO LX231



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable ACTO LX231 LCD projector has 3500 Ansi lumens, a contrast of 3200:1 and an XGA 1024 x 768 resolution. 3500 Ansi lumens ensure that a picture width of 515 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. It is also Full HD 1080P compatible. This model is no longer offered by ACTO.

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

3500

3200:1 full on/off

1,0938 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)

3200:1 full on/off

0,365 min. Lumen

XGA 1024 x 768
786.432 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

230W USHIO Lamp

Articel Nr.: 3700161500

3000 h. 4000 h. in eco Mode

-

-

Manual 1,2

F=2,3-2,5 f=18,82-22,60 mm

1,47-1,77:1

2 x 3W

HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 in

Yes

280W


327 x 87 x 241 mm (12,9"x3,4"x9,5") 6,86 L/dm³

34 / 29 dB in Eco Mode

2,90 kg / 6,39 lbs.

-

85%

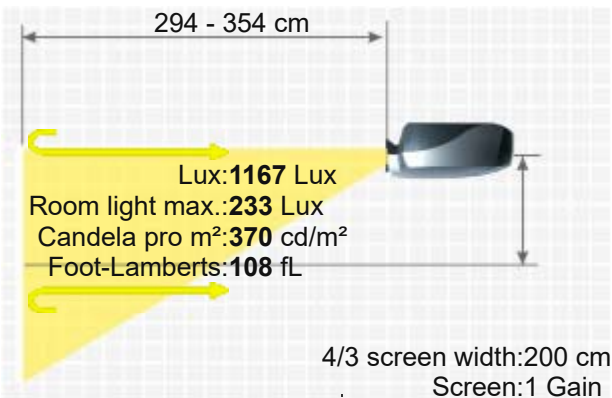

Frequenz	H-sync: 15-100 kHz V-sync: 48-100 Hz
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode ■ Lan network compatible.
Status Data	2012 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/actolx231-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.