# Hitachi CP L750




3LCD Motor

| | |
|---|---|
| Brief Introduction<br>Beta 2.5 | A brief introduction to the CP L750: The Hitachi LCD projector offers 500 Ansi lumens, a contrast of 200:1 and an SVGA 800 x 600 resolution. An image width of up to 195 cm is possible as the projector has 500 Ansi lumens. However, if room light is available, the picture should be max. 130 cm wide. The model was built by Hitachi in 1997 and is no longer current. It should also be noted that there are unfortunately no more replacement lamps for the projector, neither originals nor replicas. |
| Display Type | 1 x 1,3" LCD TFT Panel<br>SVGA 4/3 Liquid Crystal Display |

| | Projector | Screen |
|---|---|---|
| Ansi-Lumen | 500 | 162 Lux (bei 203 cm Screen) |
| Contrast | 200:1 full on/off | 200:1 full on/off |
| Black Level | 2,5000 min. Lumen | 0.823 min. Lumen |
| Offset | - | |

| | |
|---|---|
| Resolution | SVGA 800 x 600<br>480.000 Pixel<br>XGA 1024 x 768 compressed |
| Video Modes | NTSC, Pal, Secam |
| Application | Stationary \| Permanent installation in the training room and meeting room as well as the conference room.<br>Very narrow picture width and rooms with very little light. |
| Light Source | 250W Metalldampf Lamp<br>Articel Nr.: DT00111 |
| Light Life | 2000 h. |
| Operating Costs | - |
| Focus | Powered |
| Zoom | Powered 1,5 |
| Objective | F=2,3-3,0 f=48,1-72,1 mm |
| Throw Ratio | 1,82-2,73:1 |
| Audio | 2 x 2W Mono |

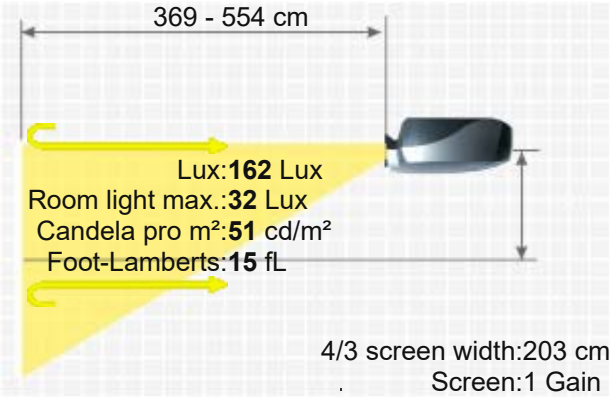


| | |
|---|---|
| Connections | RGB Input: 2 x Analog - D-sub 15-pin<br>2 x Audio - stereo mini-jack<br>RGB Output: 1 x Analog - D-sub 15-pin<br>Video Input: 2 x Composite - phono<br>2 x S-Video Mini-din 4 pin<br>2 x Audio - stereo mini-jack<br>RS232C: 1 x D-sub 15-pin |



| | |
|---|---|
| Ceiling Mounting | - |
| Power | 350W |

HITACHI CP L750

| | |
|---|---|
| Size WxHxD | 404 x 146 x 307 mm (15,9"x5,7"x12,1") 18,11 L/dm³ |
| Operating Noise | - |
| Weight | 8,20 kg / 18,08 lbs. |
| Keystone | - |
| Illumination | - |
| Frequenz | H-sync: 15,8-60 kHz<br>V-sync: 50-75 Hz |
| Foot-Lamberts | 15 fL / max. 195 cm screen width<br>51 cd/m² |
| Features | - |
| Status | 1997 Discontinued (EOL) // Last update of the data: 2023-08-04 |
| Data | |
| More Details | https://www.projector-database.com/pro/hitachicpl750-en.html |

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.