
ACTO LX645



3LCD 24/7 Netzwerk

Brief Introduction Beta 2.5	The standard portable ACTO LX645 LCD projector has 4500 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. An image width of up to 584 cm is possible as the projector has 4500 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 389 cm is recommended. It is no longer offered by the manufacturer ACTO.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	4500
Projector: Contrast	800:1 full on/off
Projector: Black Level	5,6250 min. Lumen
Projector: Offset	-
Screen	1500 Lux (bei 200 cm Screen)
Screen	800:1 full on/off
Screen	1,882 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	230W SHP Lamp Articel Nr.: 3700161500
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual
Objective	-
Throw Ratio	-
Audio	7W Mono
Connections	2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in Cinch Stereo in RS232C RJ45 in
Ceiling Mounting	Yes
Power	-
Size WxHxD	345 x 94 x 245 mm (13,6"x3,7"x9,6") 7,95 L/dm³
Operating Noise	34 / 29 dB in Eco Mode
Weight	3,20 kg / 7,05 lbs.
Keystone	-
Illumination	85%
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz
Foot-Lamberts	139 fL / max. 584 cm screen width

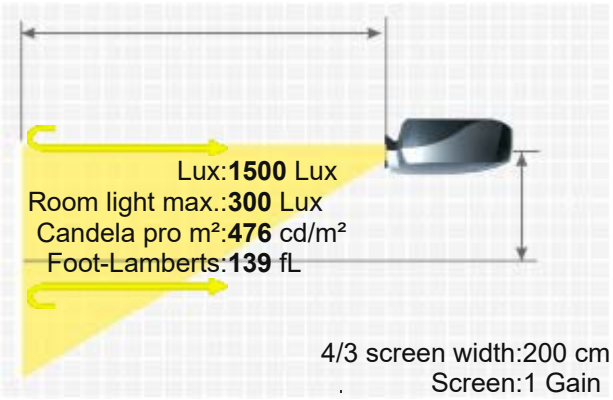

ACTO LX645

476 cd/m²

Features
- Eco Mode
- 24/7 continuous operation capable
- Lan network compatible.

Optional

Bulb only	NLMP9000982
Lamp original	3700161500
Ceiling Mount 100-120	Halterung100

Status Data
Order here: https://www.hcinema.de/lampen/shop-en.php?id=n9001581
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details
https://www.projector-database.com/pro/actolx645-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.