
Hitachi CP X615



HITACHI CP X615


Brief Introduction Beta 2.5	A brief introduction to the CP X615: The Hitachi stationary LCD projector offers 4000 Ansi lumens, a contrast of 1000:1 in theater mode and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 551 cm is possible, if the image width is smaller (we recommend max. 367 cm), rooms with residual light are also no problem. The model is also Full HD 1080P compatible. The model was built by Hitachi in 2008 and is no longer current.
Display Type	3 x 0,79" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 4000 / 3200 im Eco Mode — Screen: 1333 Lux (bei 200 cm Screen)
Contrast	Projector: 1000:1 full on/off im Theatre Mode — Screen: 1000:1 full on/off im Theatre Mode
Black Level	Projector: 4,0000 min. Lumen — Screen: 1,337 min. Lumen
Lens shift	Vert.: +50% -0% Hori.: +/-10% manuell
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	275W UHB Lamp Articel Nr.: DT00871
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	5,18% / 0,17 €
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,7-1,9 f=24,3-29,2 mm
Throw Ratio	1,5-1,8:1
Audio	4 x 4W
Connections	HDMI in D-sub 15 in und out 5 x BNC RGBHC in YUV in S-Video in Cinch Video in Cinch Stereo in Mini Jack in und out RJ45

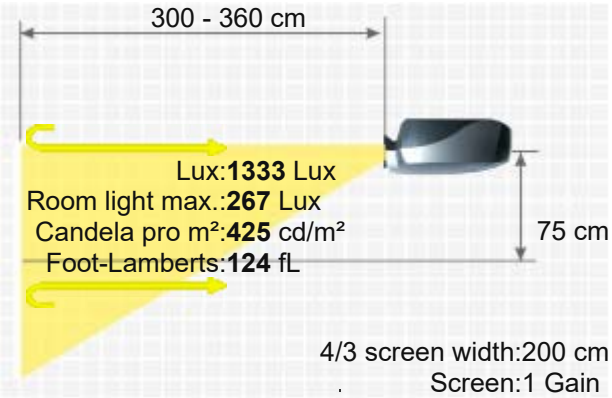

USB Typ B



Ceiling Mounting	Yes
Power	460W
Size WxHxD	420 x 139 x 319 mm (16,5"x5,5"x12,6") 18,62 L/dm³
Operating Noise	39 / 33 dB in Eco Mode

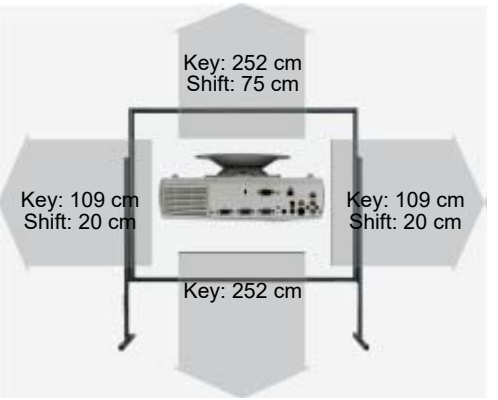

Weight	7,00 kg / 15,43 lbs.
Keystone	Vert.: +/-40° Hori.: +/-20°
Illumination	-
Frequenz	H-sync: 31,5-106 kHz V-sync: 56-120 Hz
Foot-Lamberts	124 fL / max. 551 cm screen width 425 cd/m²

Features

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion manuell
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Dynamic iris
- Password protection
- Remote control with laser pointer
- Control via web browser
- Wi-Fi network compatible.
- Lan network compatible.
- Overscan adjustable
- De-interlacer with 3:2 pull down..

Optional

Bulb only	NLMP17930
Lamp ruby	Ruby-LMP17930
Lamp incl. air filter original	DT00871
Compatible lamp	LMP-K17929
Remote original	HL02881- R016F / HL03032 - R017H / HL02483
Air filter original	MU03642

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n18646

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
UL-604	4-7.48:1	8-15 m	50%	+/-10%	Manual
SL-602	1.25-2.01:1	2.5-4 m	50%	+/-10%	Manual
LL-603	2.04-3.93:1	4.1-7.9 m	50%	+/-10%	Manual
Fix Optional Lenses					
FL-601	0.79:1	1.6 m	0.0% Fix		No Zoom

Status Data: 2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: https://www.projector-database.com/pro/hitachicpx615-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.