

Hitachi ED X24

HITACHI ED X24



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

The ED X24 LCD has 2200 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a picture width of 408 cm well. If room light is available, however, the picture width should ideally not exceed 272 cm. Playing 1080P is also no problem for the projector. The model was built by Hitachi in 2009 and is no longer current.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

2200 / 1500 im Eco Mode

400:1 full on/off

5,5000 min. Lumen

Screen

733 Lux (bei 200 cm Screen)

400:1 full on/off

1,846 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

190W UHB Lamp

Articel Nr.: DT01022

3000 h. 6000 h. in Eco Mode

-

Manual

Manual 1,2

f=19-23 mm

1,4-1,7:1


1W Mono

1 x D-sub 15 pin in 1 x out

Cinch Video in

S-Video in

Mini jack in

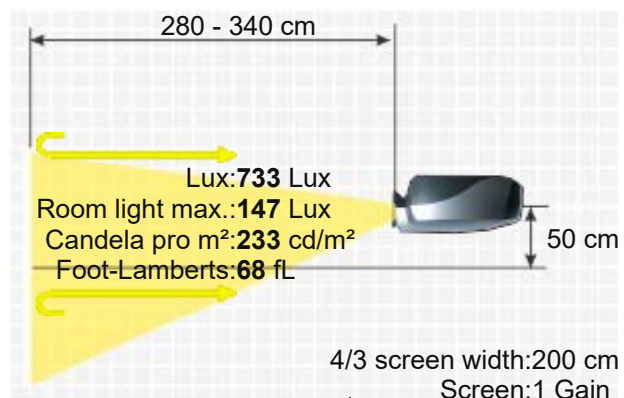

Size WxHxD 317 x 98 x 288 mm (12,5"x3,9"x11,3") 8,95 L/dm³
Operating Noise 35 / 29 dB in Eco Mode

Weight 3,20 kg / 7,05 lbs.
Keystone Vert.: +/-30° automatisch
Illumination -

Frequenz H-sync: 15-106 kHz
V-sync: 50-120 Hz

Foot-Lamberts 68 fL / max. 408 cm screen width
233 cd/m²

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Gamma correction
- Password protection
- Overscan adjustable

Optional	Osram bulb only	NLMP18941
	Lamp ruby	Ruby-LMP18941
	Lamp original	DT01022 / DT01026
	Compatible lamp	LMP-K18941
	Universal Remote original	Fernb-uni-V3
	Air filter original	NJ26302
	Ceiling Mount 100-120	Halterung100



More Details



HCinema

<https://www.projector-database.com/pro/hitachiedx24-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

