ADI PJT 310






Brief Introduction Beta 2.5	A brief introduction to the ADI PJT 310. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 200:1. The brightness of 1400 Ansi lumens enables a picture width of 326 cm. In room light, the picture should be max. 217 cm wide. It is no longer offered by the manufacturer ADI. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	1400	453 Lux (bei 203 cm Screen)
Contrast	200:1 full on/off	200:1 full on/off
Black Level	7,0000 min. Lumen	2.3 min. Lumen

Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, NTSC, Secam
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W UHE Lamp Articel Nr.: LMP4808
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered
Objective	-
Throw Ratio	-
Audio	2 x 2W
Connections	15-pin D-sub Stecker (D-sub 15pin in), Video RCA, S-Video, Stereo audio mini-phone jack x 1 PS/2 und USB für Maus x 1 15-pin D-sub Stecker (VGA out)
Ceiling Mounting	Yes
Power	210W
Size WxHxD	324 x 80 x 245 mm (12,8"x3,1"x9,6") 6,35 L/dm³
Operating Noise	-
Weight	3,80 kg / 8,38 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	42 fL / max. 326 cm screen width

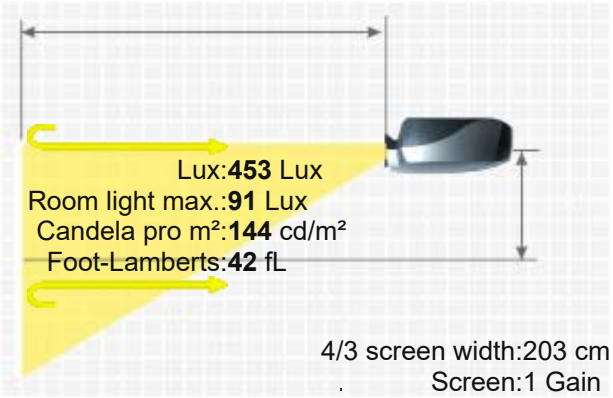

ADI PJT 310

	144 cd/m²
Features	■ Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-10-26
Data	

More Details

https://www.projector-database.com/pro/adipjt310-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.