
Hewlett Packard ep9012



Brief Introduction Beta 2.5	A brief introduction to the ep9012: The Hewlett Packard DLP projector offers 840 Ansi lumens, a contrast of 1600:1 and an SVGA 800 x 600 resolution. The lamp life is specified by the manufacturer as 4000 hours, which converts to over 5.5 years at 2 hours per day. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. 840 Ansi lumens ensure that a picture width of 252 cm is also possible. However, if room light is available, the picture should be max. 168 cm wide. The model was built by Hewlett Packard in 2004 and is no longer current.
Display Type	1 x 0,55" 12 Grad DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 840 / Screen: 280 Lux (bei 200 cm Screen)
Contrast	Projector: 1600:1 full on/off / Screen: 1600:1 full on/off
Black Level Offset	Projector: 0,5250 min. Lumen / Screen: 0,175 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
	Media player formats: VCD SVCD JPEG Kodak Picture CD MP3
Disc Recognition	DVD | HD Blu-ray (komprimiert) | ~~3D Blu-ray~~ | ~~4K UHD Blu-ray~~
Application	Homeciname | Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	210W Lamp Articel Nr.: L1731a
Light Life	4000 h.
Operating Costs	4,11% / 0,03 €
Focus	Manual
Zoom	Manual 1,16
Objective	F=2,4 f=19-22 mm
Throw Ratio	1,7-2,0:1
Audio	20W / 30W SubWoofer
Connections	DVI-I mit HDCP YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack (Kopfhörer) out

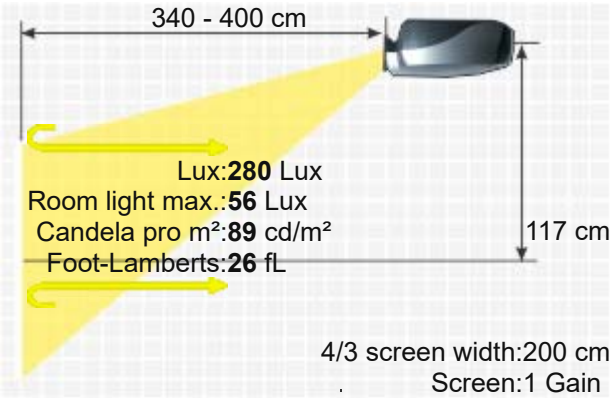


HEWLETT PACKARD EP9012

Koaxial out



Ceiling Mounting	Yes
Power	-
Size WxHxD	524 x 320 x 400 mm (20,6"x12,6"x15,7") 67,07 L/dm³
Operating Noise	34dB

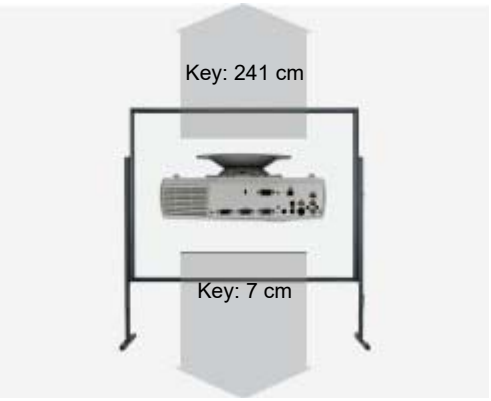

Weight	10,50 kg / 22,05 lbs.
Keystone	Vert.: +/-20°
Illumination	80%
Frequenz	H-sync: 31-60 kHz V-sync: 43-85 Hz
Foot-Lamberts	26 fL / max. 252 cm screen width 89 cd/m²
Features	■ Integrated Mediaplayer ■ 6-segment colour wheel ■ Integrated DVD drive and 2.1 sound

Optional		
	Lamp ruby	Ruby-LMP1700
	Lamp original	L1731A
	Universal Remote original	Fernb-uni-V3

Status: Order here: https://www.hcinema.de/lampen/shop-en.php?id=d9000338
2004 Discontinued (EOL) // Last update of the data: 2023-10-17

Data



More Details

HCinema
https://www.projector-database.com/pro/hpep9012-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.