Alphapro compact c1026



3LCD Pointer

Brief Introduction Beta 2.5	A brief introduction to the Alphapro compact c1026. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 250:1. 1300 Ansi lumens ensure that a picture width of 314 cm is also possible. However, if room light is available, the picture should be max. 209 cm wide. It is no longer offered by the manufacturer Alphapro.
Display Type	3 x 0,9" LCD psi TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	1300	421 Lux (bei 203 cm Screen)
Contrast	250:1 full on/off	250:1 full on/off
Black Level	5,2000 min. Lumen	1.705 min. Lumen

Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W UHP Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,32
Objective	F=2,0-2,3 f=38-50 mm
Throw Ratio	2,08-2,73:1
Audio	3W Stereo
Connections	Cinch Video in 3 x Audio Eingang 1 xAudio Ausgang D-sub 15pin in VGA Ausgang S Video Eingang RS232C Controuler Maus Port Eingang
Ceiling Mounting	Yes
Power	190W
Size WxHxD	341 x 225 x 122 mm (13,4"x8,9"x4,8") 9,36 L/dm³
Operating Noise	35dB

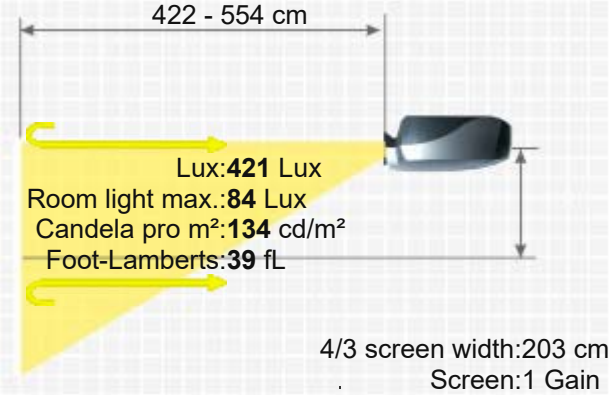

Weight	3,60 kg / 7,94 lbs.
Keystone	-
Illumination	90%
Frequenz	H-sync: 15-140 kHz V-sync: 45-180 Hz
Foot-Lamberts	39 fL / max. 314 cm screen width

ALPHAPRO COMPACT C1026

	134 cd/m²
Features	■ Freeze ■ Remote control with laser pointer
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/alphaprocompactc1026-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.