
InFocus IN124x



INFOCUS IN124X

Brief Introduction Beta 2.5	The standard portable InFocus IN124x 3D BrilliantColor DLP projector has 4000 Ansi lumens, a contrast of 14000:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 4000 Ansi lumens, a picture width of 551 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 367 cm). It is also Full HD 1080P and 3D compatible. The model was built by InFocus in 2016 and is no longer current.
Display Type	1 x DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 4000 / 3200 im Eco Mode — Screen: 1333 Lux (bei 200 cm Screen)
Contrast	Projector: 14000:1 full on/off — Screen: 14000:1 full on/off
Black Level Offset	Projector: 0,2857 min. Lumen — Screen: 0,095 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	260 / 220W im Eco Mode Lamp Articel Nr.: SP-LAMP-094
Light Life	2000 h. 3500 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	-
Throw Ratio	1,9-2,09:1
Audio	10W Mono
Connections	HDMI 1.4 in 2 x D-sub 15pin in 1 x out Cinch Video in S-Video in Mini Jack Audio in und out USB Typ B in RS232C Din 9 pin in RJ45 in



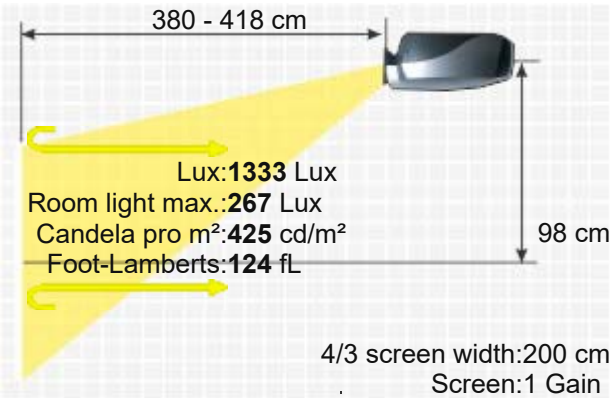

Ceiling Mounting	Yes
Power	-
Size WxHxD	292 x 98 x 221 mm (11,5"x3,9"x8,7") 6,32 L/dm³
Operating Noise	34 / 32 dB in Eco Mode
Weight	2,30 kg / 5,07 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-91 kHz V-sync: 24-120 Hz
Foot-Lamberts	124 fL / max. 551 cm screen width 425 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- BrilliantColor™
- Lan network compatible.
- Crestron®-Software compatible.
- 6 segment colour wheel, 2x speed.

Optional

Lamp original	SP-LAMP-094
Remote control original	HW-NAVIGATOR-5

Order here: https://www.hcinema.de/lampen/shop-en.php?id=23796

Status

2016 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2016-08-24 11:13:09

Data



More Details

https://www.projector-database.com/pro/infocusIN124x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.