
Ampro 2600/G



Display Type	 3 x 7" ESF Liquid coupled CRT Röhre UXGA 4/3 Elektrostatisch Fokussierte Röhre		
Ansi-Lumen	Projector 130 / 725 Peaker White	Screen	43 Lux (bei 200 cm Screen)
Contrast	100:1 full on/off		-
Black Level	-		-
Offset	-		
Resolution	UXGA 1600 x 1200 1.920.000 Pixel		
Video Modes	NTSC, PAL, SECAM, HDTV		
Application	CRT Projection | Very narrow picture width and rooms with very little light.		
Light Source	CRT Röhre		
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)		
Operating Costs	-		
Focus	Manual		
Zoom	No Zoom		
Objective	Air-coupled HD-6		
Throw Ratio	-		
Audio	No		
Connections	-		
Ceiling Mounting	-		
Power	400W		
Size WxHxD	580 x 250 x 810 mm (22,8"x9,8"x31,9") 117,45 L/dm³		
Operating Noise	-		

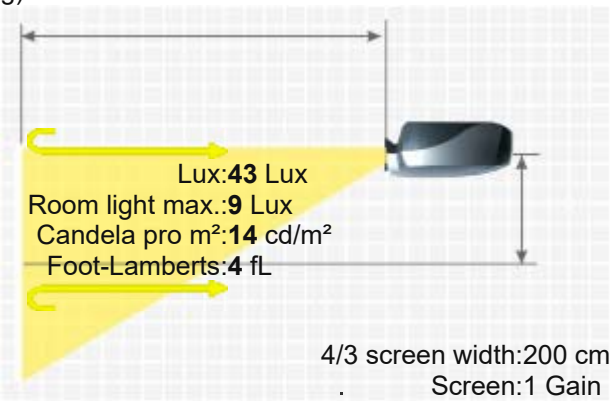

Weight	45,00 kg / 99,21 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-64 kHz V-sync: 40-150 Hz Range max.: 70 MHz
Foot-Lamberts	4 fL / max. 99 cm screen width 14 cd/m²
Features	-
Status	1995 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/ampro2600g-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.