
InFocus IN114xv




INFOCUS IN114XV

Brief Introduction Beta 2.5	With the IN114xv, manufacturer InFocus offers a standard portable DLP projector with XGA 1024 x 768 resolution and a contrast of 16000:1. The service life of the lamp is up to 5000 hours, which is equivalent to over 6.8 years at 2 hours per day. 3400 Ansi lumens ensure that a picture width of 508 cm is also possible. However, if room light is available, the picture should be a maximum of 339 cm wide. Playing 1080P and 3D is also no problem for the projector. The model was built by InFocus in 2017 and is no longer current.
Display Type	1 x 0,55" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3400 / 2700 im Eco Mode — Screen: 1133 Lux (bei 200 cm Screen)
Contrast	Projector: 16000:1 full on/off — Screen: 16000:1 full on/off
Black Level	Projector: 0,2125 min. Lumen — Screen: 0,071 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel WUXGA 1920 x 1200 compressed
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
3D Compatibility	Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	195 / 160W im Eco Mode Lamp Articel Nr.: SP-LAMP-097
Light Life	5000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,24
Objective	-
Throw Ratio	1,95-2,15:1
Audio	2W Mono
Connections	HDMI 1.4b in 2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in RS232C USB Typ B Mini Jack Audio in und out

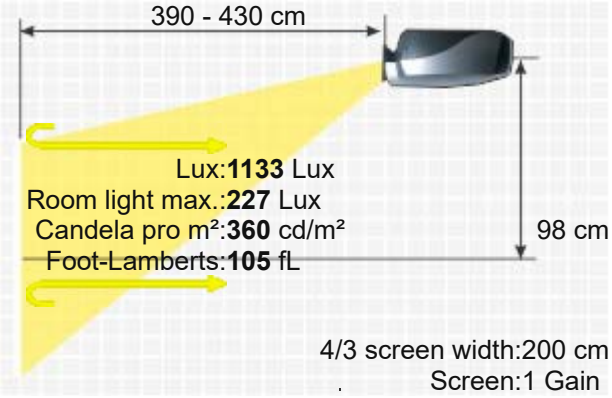

Ceiling Mounting	Yes
Power	-
Size WxHxD	223,5 x 101,7 x 314,20 mm (8,8"x4"x12,4") 7,07 L/dm³
Operating Noise	31 / 28 dB in Eco Mode
Weight	2,50 kg / 5,51 lbs.
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	H-sync: 31-97 kHz V-sync: 56-120 Hz
Foot-Lamberts	105 fL / max. 508 cm screen width 360 cd/m²

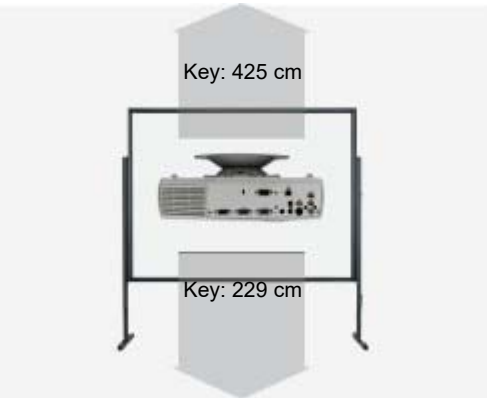

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Blank (Black screen button)
- Eco Mode
- Kensington Slot
- Password protection
- BrilliantColor™
- 6 segment, 2x speed colour wheel

Optional

Remote control original	SP.8VH02GC01
Lamp original	SP-LAMP-097

Order here: https://www.hcinema.de/lampen/shop-en.php?id=fro24446

Status: 2017 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2017-10-25 14:40:06

Data



More Details

HCinema
https://www.projector-database.com/pro/infocusin114xv-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.