
Ampro 4600



Display Type	3 x 9" EMF Liquid coupled CRT 2 4/3 Elektromagnetisch Fokussierte Röhre		
Ansi-Lumen	Projector 270 1200 / Peaker White	Screen	90 Lux (bei 200 cm Screen)
Contrast	150:1 full on/off		-
Black Level	-		-
Offset	-		
Resolution	2500 x 2000		
Video Modes	NTSC, PAL, SECAM		
Application	CRT Projection | Very narrow picture width and rooms with very little light.		
Light Source	CRT Röhre		
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)		
Operating Costs	-		
Focus	Manual		
Zoom	No Zoom		
Objective	F=1,15 HD-10 GT17		
Throw Ratio	-		
Audio	-		
Connections	5 x BNC RGBHC in		
Ceiling Mounting	-		
Power	800W		
Size WxHxD	810 x 320 x 990 mm (31,9"x12,6"x39") 256,61 L/dm³		
Operating Noise	-		

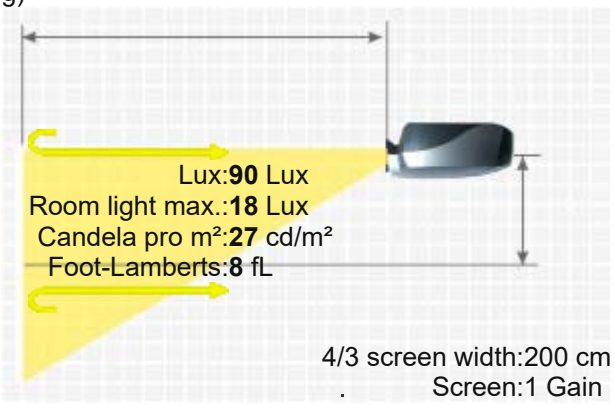

Weight	80,00 kg / 176,37 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-105 kHz V-sync: 40-150 Hz Range max.: 100 MHz
Foot-Lamberts	8 fL / max. 143 cm screen width 27 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/ampro4600-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

AMPRO 4600