
Ampro 7300



W.-Optiken

Brief Introduction Beta 2.5	The Ampro 7300 projector has 3000 Ansi lumens, a contrast of 250:1 and an SXGA 1280 x 1024 resolution. Thanks to the brightness of 3000 Ansi lumens, a picture width of 464 cm is possible. In room light, the picture should be max. 309 cm wide. This model is no longer offered by Ampro.
Display Type	[redacted] -
Ansi-Lumen	Projector: 3000 / Screen: 910 Lux (bei 203 cm Screen)
Contrast	Projector: 250:1 full on/off / Screen: 250:1 full on/off
Black Level	Projector: 12,0000 min. Lumen / Screen: 3.688 min. Lumen
Offset	-
Resolution	SXGA 1280 x 1024 1.310.720 Pixel
Video Modes	NTSC, PAL, SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	1050W Xenon Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	No Zoom
Objective	optional
Throw Ratio	optional
Audio	No
Connections	S-Video in Cinch Video
Ceiling Mounting	-
Power	2369W
Size WxHxD	760 x 380 x 960 mm (29,9"x15"x37,8") 277,25 L/dm³
Operating Noise	-

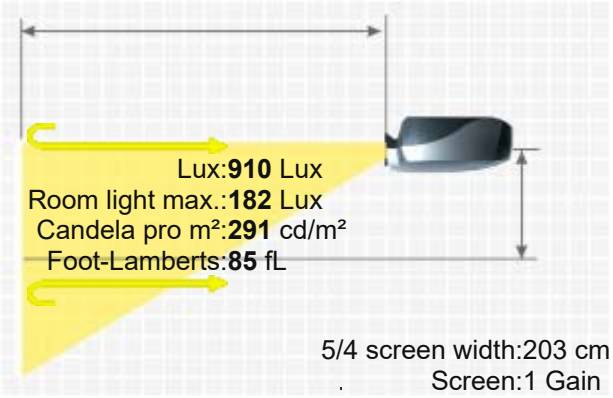

Weight	95,00 kg / 209,44 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-105 kHz V-sync: 50-120 Hz Range max.: 120 MHz
Foot-Lamberts	85 fL / max. 464 cm screen width 291 cd/m²
Features	-

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom

Fix Optional Lenses

AMPRO 7300

Ampro Objektiv 6	7:1	14.2 m	No Zoom
Ampro Objektiv 5	5:1	10.2 m	No Zoom
Ampro Objektiv 4	4:1	8.1 m	No Zoom
Ampro Objektiv 3	3:1	6.1 m	No Zoom
Ampro Objektiv 2	1.5:1	3 m	No Zoom
Ampro Objektiv 1	1:1	2 m	No Zoom

Status Data 1997 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

https://www.projector-database.com/pro/ampro7300-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.