InFocus IN3108



INFOCUS IN3108

Brief Introduction Beta 2.5	A brief introduction to the IN3108: The InFocus standard portable BrilliantColor DLP projector offers 3500 Ansi lumens, a contrast of 2000:1 and a WXGA 1280 x 800 resolution. 3500 Ansi lumens ensure that an image width of 601 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 401 cm. Furthermore, the projector can play 1080P without any problems. The model was built by InFocus in 2009 and is no longer current.
Display Type	1 x 0,65" LVDS DDP2230 DLP Chip WXGA 16/10 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	3500 / 2800 im Eco Mode
Projector: Contrast	2000:1 full on/off
Projector: Black Level Offset	1,7500 min. Lumen
Screen	1400 Lux (bei 200 cm Screen) 2000:1 full on/off 0,701 min. Lumen
Resolution	WXGA 1280 x 800 1.024.000 Pixel HDTV 1920 x 1080 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	280W Lamp Articel Nr.: SP-LAMP-042
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,1
Objective	-
Throw Ratio	1,95-2,15:1
Audio	2 x 3W Stereo
Connections	HDMI 1.3 in 2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in Cinch Stereo in Mini Jack Audio in und out RS232C Din 9pin in
Ceiling Mounting	Yes
Power	-
Size WxHxD	316 x 95 x 249 mm (12,4"x3,7"x9,8") 7,47 L/dm³
Operating Noise	35dB

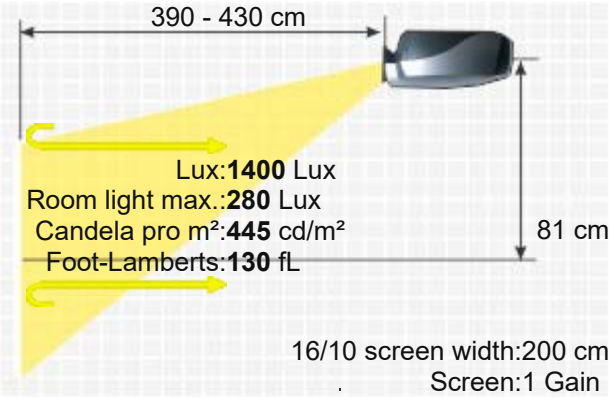





Weight	3,18 kg / 7,01 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 15,75-100 kHz V-sync: 50-85 Hz
Foot-Lamberts	130 fL / max. 601 cm screen width 445 cd/m²



Features

- Full HD 1080P compatible
- Freeze
- Blank (Black screen button)
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Gamma correction
- Password protection
- BrilliantColor™
- Remote control with mouse control
- Overscan adjustable
- digital zoom
- 5-segment colour wheel

Optional

Bulb only Osram	NLMP18509
Lamp ruby	Ruby-LMP18509
Lamp original	SP-LAMP-042
Compatible lamp	LMP-K18508
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n18917

Status Data: 2009 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: HCinema https://www.projector-database.com/pro/infocusin3108-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.