InFocus IN3116

INFOCUS IN3116

Brief Introduction Beta 2.5	A brief introduction to the IN3116: The InFocus BrilliantColor DLP projector offers 3500 Ansi lumens, a contrast of 2100:1 and a WXGA 1280 x 800 resolution. The integrated media player allows files to be played directly. 3500 Ansi lumens ensure that a picture width of 601 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 401 cm. It is also Full HD 1080P compatible. The operating noise of just 30 decibels makes the projection quiet. The model was built by InFocus in 2009 and is no longer current.
Display Type	1 x 0,65" LVDS DDP2430 DLP Chip WXGA 16/10 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 3500 / 2800 im Eco Mode — Screen: 1400 Lux (200 cm Screen width)
Contrast	Projector: 2100:1 full on/off — Screen: 2100:1 full on/off
Black Level	Projector: 1,6667 min. Lumen — Screen: 0,667 min. Lumen
Offset	
Resolution	WXGA 1280 x 800 1.024.000 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p **Media player formats:** PDF, BMP, TIFF, PNG, GIF JPEG
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	185W Lamp Article Nr.: SP-LAMP-058
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	-
Throw Ratio	1,5-1,8:1
Audio	2 x 5W
Connections	2 x D-sub 15 pin in 1 x out S-Video in Cinch Video in Mini Jack Audio in USB RS232C Din 9 pin in RJ45 in
Ceiling Mounting	Yes, is possible.

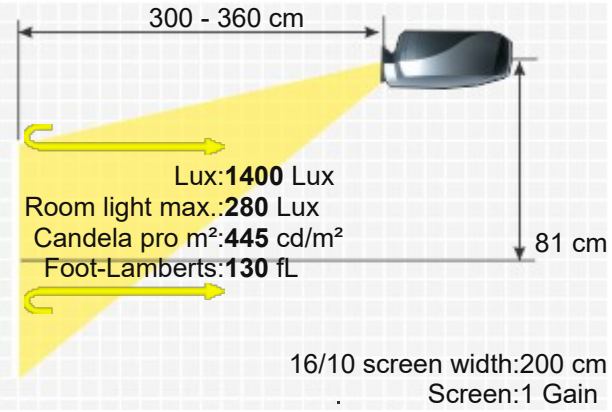

Power	288W
Size WxHxD	315 x 116,8 x 241,3 mm (12,4"x4,6"x9,5") 8,81 L/dm³
Operating Noise	30 / 28 dB in Eco Mode

Key: 254 cm

Weight	3,17 kg / 6,99 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 15,75-100 kHz V-sync: 80-85 Hz
Foot-Lamberts	130 fL / max. 601 cm screen width 445 cd/m²

Key: 92 cm

Features

- Full HD 1080P compatible
- Integrated Mediaplayer
- Freeze
- Blank (Black screen button)
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Gamma correction
- Password protection
- BrilliantColor™
- Remote control with mouse control
- Control via web browser
- Lan network compatible.
- Overscan adjustable
-

Screen Mirroring: -

Optional accessories

Lampe Ruby	Ruby-LMP19434	102,77 €
Lampe Original	SP-LAMP-058	EOL €
Kompatible Lampe	LMP-K19434	59,07 €
Universal Fernbedienung	Fernb-uni-V3	22,31 €
Deckenhalterung 100-120	Halterung100	47,86 €

Status: 2009 Discontinued (EOL) // Last update of the data: 2026-06-09

Data

More Details

HCinema

https://www.projector-database.com/pro/infocusin3116-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.