

Ampro LCD 4200



AMPRO LCD 4200

Brief Introduction Beta 2.5	The standard portable LCD 4200 LCD has 2200 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. 2200 Ansi lumens ensure that a picture width of 408 cm is also possible. However, if room light is available, the picture should be max. 272 cm wide. The model is no longer offered by Ampro.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector Ansi-Lumen	2200
Contrast	400:1 full on/off
Black Level	5,5000 min. Lumen
Offset	-
Screen Ansi-Lumen	712 Lux (bei 203 cm Screen)
Contrast	400:1 full on/off
Black Level	1.794 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280×1024 compressed
Video Modes	SECAM, NTSC, HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	155W UHE Lamp Articel Nr.: LMPf302
Light Life	2000 h.
Operating Costs	-
Focus	-
Zoom	-
Objective	F=1,8-2,1 f=36-47 mm
Throw Ratio	1,97-2,57:1
Audio	1W
Connections	D-sub 15pin in Cinch Video in Cinch Stereo in S-Video in Mini Jack out RS232C
Ceiling Mounting	Yes
Power	-
Size WxHxD	235 x 89 x 275 mm (9,3"x3,5"x10,8") 5,75 L/dm³
Operating Noise	36dB
Weight	3,50 kg / 7,72 lbs.
Keystone	Vert.: +/-40°
Illumination	-
Frequenz	-
Foot-Lamberts	66 fL / max. 408 cm screen width 226 cd/m²

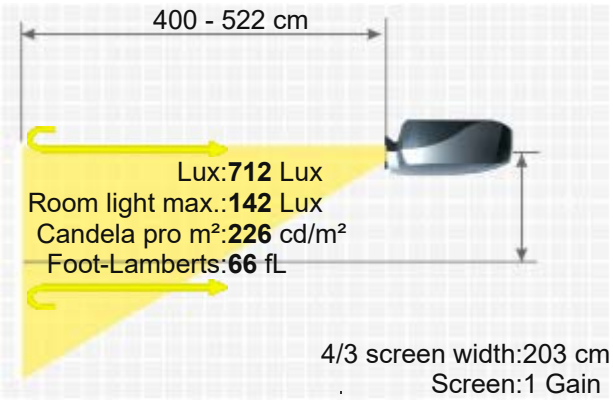

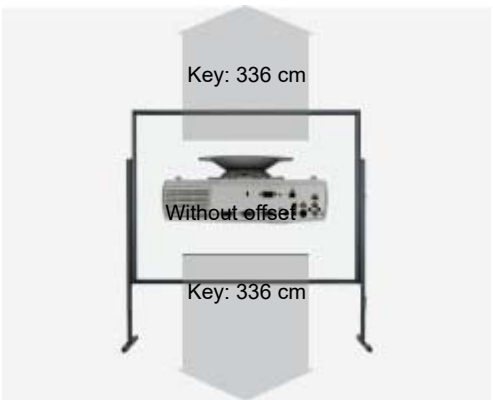

Features	■
Please note	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/amprolcd4200-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.