
InFocus IN5124



3LCD | 24/7 | Media Player | PJLink | Netzwerk | CRESTRON Steuerung

Brief Introduction Beta 2.5	The InFocus IN5124 standard portable LCD projector has 4000 Ansi lumens, a contrast of 2000:1 and a WXGA 1280 x 800 resolution. The integrated media player allows files to be played directly. Thanks to the brightness of 4000 Ansi lumens, a picture width of 643 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend a maximum of 429 cm). Playing 1080P is also no problem for the projector. The model was built by InFocus in 2011 and is no longer current.
Display Type	3 x 0,59" LCD TFT Panel WXGA 16/10 Liquid Crystal Display
Projector Ansi-Lumen	4000
Contrast	2000:1 full on/off
Black Level	2,0000 min. Lumen
Offset	-
Screen Ansi-Lumen	1600 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off
Black Level	0,801 min. Lumen
Resolution	WXGA 1280 x 800 1.024.000 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p **Media player formats:** JPEG BMP PNG GIF
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	245W Lamp Articel Nr.: SP-LAMP-064
Light Life	3000 h. 5000 h. in Eco Mode
Operating Costs	21,43% / 0,09 €
Focus	Manual
Zoom	Manual
Objective	-
Throw Ratio	-
Audio	2 x 8W
Connections	HDMI in D-sub 15 pin in 5 x BNC RGBHV in YUV in S-Video in Cinch Video in Cinch Stereo in RS232C in RJ45 in
Ceiling Mounting	Yes
Power	-
Size WxHxD	400,1 x 102,9 x 317,50 mm (15,8"x4,1"x12,5") 12,93 L/dm³
Operating Noise	32dB
Weight	4,80 kg / 10,58 lbs.
Keystone	-
Illumination	-

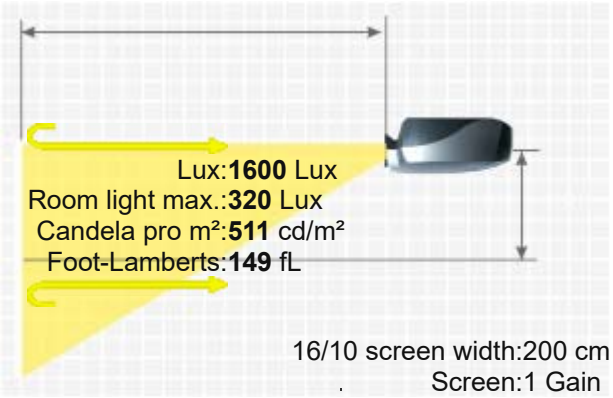

INFOCUS IN5124

Frequenz	H-sync: 15-106 kHz V-sync: 50-120 Hz
Foot-Lamberts	149 fL / max. 643 cm screen width
	511 cd/m²
Features	■ Full HD 1080P compatible ■ Integrated Mediaplayer ■ Blank (Black screen button) ■ User logo ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ 24/7 continuous operation capable ■ Password protection ■ PJLink™ ■ Lan network compatible. ■ Overscan adjustable ■ Crestron®-Software compatible.
Optional	Lamp incl. air filter original — SP-LAMP-064 Air filter original — MU06641 Order here: https://www.hcinema.de/lampen/shop-en.php?id=19944
Status Data	2011 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/infocusin5124-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.